

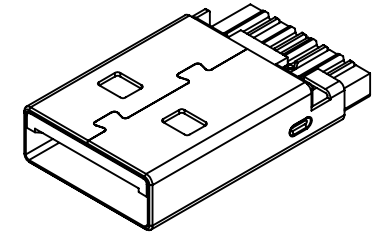

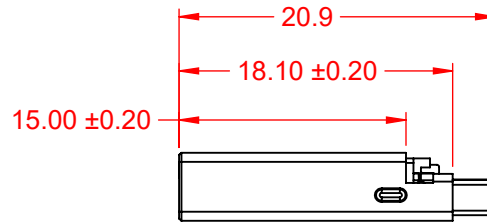


TOLERANCE UNLESS OTHERWISE SPECIFIED	
.X	±0.25
.XX	±0.13
.XXX	±0.05

THIS IS A C.A.D. GENERATED DRAWING
DO NOT MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER	
ORIGINAL	①

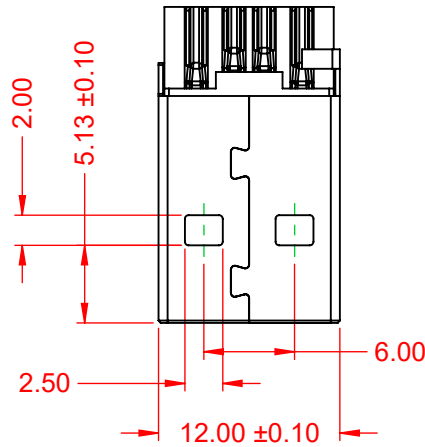

NOTES:

MATERIAL:	SPCC, T=0.35mm
SHELL:	NICKEL PLATED 50µ" MIN. OVERALL
SHELL PLATING:	COPPY ALLOY
TERMINAL:	GOLD FLASH PLATING ON CONTACT AREA,
TERMINAL PLATING:	TIN PLATED ON SOLDER TAIL, 50µ" MIN,
	NICKEL UNDERPLATED OVERALL
HOUSING:	BLACK PBT
ELETRICAL:	
RATED VOLTAGE:	30 Vrms MAX.
RATED CURRENT:	1.5A
INSULATION RESISTANCE:	1000Ω MIN. 500V DC
DIELECTIV WITHSTANDING VOLTAGE:	500V AC
CONTACT RESISTANCE:	30mΩ
ENVIROMENTAL:	
OPERATING TEMPERATURE:	-40°C TO +80°C
STORAGE TEMPERATURE:	STORAGE -20°C TO +60°C
STORAGE LIFE:	12 MONTHS MAX.
MECHANICAL:	
INSERTION FORCE:	35N MAX
EXTRACTION FOCE:	10N MIN.
DURABILITY:	1500 CYCLE



THIS SERIES FULLY CONFORMS TO
THE EUROPEAN UNION DIRECTIVES
2011/65/EU FOR RoHS COMPLIANCY.



YOUR CONNECTION TO QUALITY & SERVICE

EDAC INC
TORONTO, ONTARIO
CANADA

THESE DRAWINGS AND SPECIFICATIONS
ARE THE PROPERTY OF EDAC INC., AND
SHALL NOT BE REPRODUCED, OR COPIED
OR USED AS THE BASIS FOR THE
MANUFACTURE OR SALE OF APPARATUS
WITHOUT WRITTEN PERMISSION.

**691 SERIES - USB 2.0 TYPE A -
CABLE END SOLDER CUP**

ACAD REFERENCE NO.: **691C104-X90-12X**

DRAWN: C.B

DATE: December 15, 2020

CHECKED:

DATE:

SCALE: 2:1

SHEET 1 OF 1

DRAWING NUMBER: **691C104-X90-12X**

ISSUE

PART NUMBER: **691C104-290-121**

1