


TOLERANCE UNLESS OTHERWISE SPECIFIED	
.X	±0.25
.XX	±0.13
.XXX	±0.05

THIS IS A C.A.D. GENERATED DRAWING  
DO NOT MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER	
ORIGINAL	①

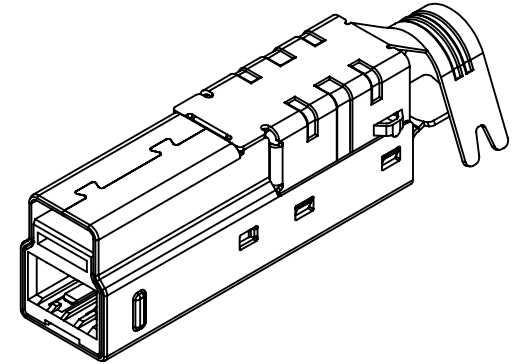

**NOTE:**  
**ELECTRICAL SPECIFICATIONS:**  
**VOLTAGE RATING:** 30V MAX.  
**CURRENT RATING:** 1.8A PER PIN 1 & PIN 4  
0.25A FOR OTHER CONTACTS  
**CONTACT RESISTANCE:** 30mΩ MAX. FOR PIN 1 & PIN 4  
50mΩ MAX FOR OTHER CONTACTS  
**INSULATOR RESISTANCE:** 100MΩ min.  
**DIELECTRIC WITHSTANDING VOLTAGE:** 100V AC  
**OPERATING TEMPERATURE:** -20°C ~ 85°C

**MATERIAL & FINISH:**  
**SHELL:** STAINLESS STEEL, NICKEL PLATING  
**HOUSING:** PA66, BLUE IN COLOUR, UL94V-0  
**CONTACTS:** COPPER ALLOY, T=0.25  
30µ" GOLD PLATED

<b>690 SERIES PLUGS USB TYPE-B CABLE END</b>		ACAD REFERENCE NO.: 691F209-X90-7XX	
		DRAWN: C.B	DATE: December 19, 2020
<b>EDAC</b> TORONTO, ONTARIO CANADA YOUR CONNECTION TO QUALITY & SERVICE		CHECKED:	
		DATE:	
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC., AND SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.		SCALE: 2:1	SHEET 1 OF 1
		DRAWING NUMBER: 691F209-X90-7XX	ISSUE 1
		PART NUMBER: 691F209-690-772	1



THIS SERIES FULLY CONFORMS TO  
THE EUROPEAN UNION DIRECTIVES  
2011/65/EU FOR RoHS COMPLIANCY.