


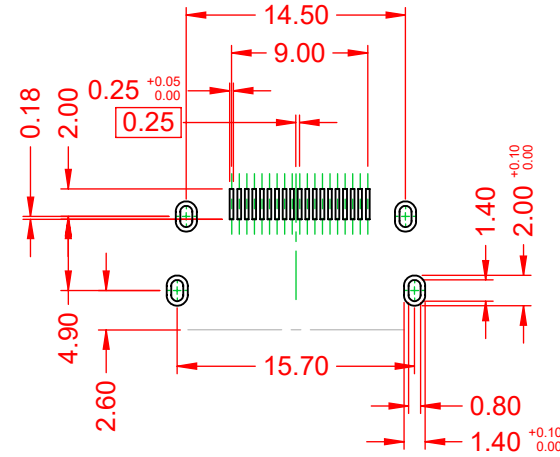
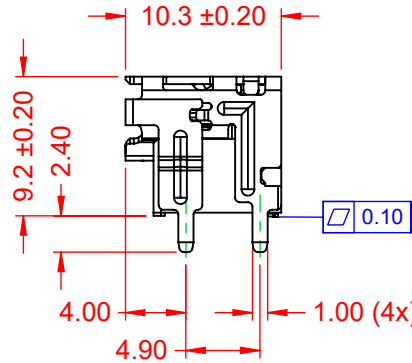



| TOLERANCE<br>UNLESS OTHERWISE<br>SPECIFIED |       |
|--|-------|
| .X   | ±0.25 |
| .XX  | ±0.15 |
| .XXX                                       | ±0.05 |

THIS IS A C.A.D. GENERATED DRAWING  
DO NOT MAKE MANUAL REVISIONS TO MASTER.

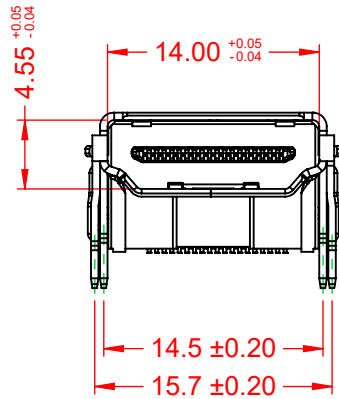

| ISSUE NUMBER |   |
|--------------|---|
| ORIGINAL     | 1 |



RECOMMENDED P.C.B LAYOUT  
CONNECTOR SIDE / TOP VIEW  
TOLERANCE: ±0.05

**NOTE:**

**ELECTRICAL SPECIFICATIONS:**

- CURRENT RATING: 0.5A
- VOLTAGE RATING: 40V AC
- CONTACT RESISTANCE: 10mΩ MAX.
- DIELECTRIC WITHSTANDING VOLTAGE: 300V AC/ 1 MINUTE
- INSULATOR RESISTANCE:
  - A) UNMATED: 100MΩ min. @ 500 VDC
  - B) MATED: 10M min. @ 150 VDC
- OPERATING TEMPERATURE: -20°C~85°C
- STORAGE TEMPERATURE: -20°C~65°C

**MATERIAL & FINISH:**

- SHELL: COPPER ALLOY, NICKEL PLATED
- HOUSING: LCP, BLACK IN COLOUR, UL94V-0
- CONTACTS: COPPER ALLOY, 10µ" GOLD PLATED

**HDMI 2.1 CONNECTOR - RIGHT ANGLE SMT**

|                                     |                       |
|-------------------------------------|-----------------------|
| ACAD REFERENCE NO.: 694A619-X65-211 |                       |
| DRAWN: C.B                          | DATE: January 5, 2021 |
| CHECKED:                            | DATE:                 |
| SCALE: 2:1                          | SHEET 1 OF 1          |
| DRAWING NUMBER: 694A619-X65-211     | ISSUE                 |
| PART NUMBER: 694A619-365-211        | 1                     |



THIS SERIES FULLY CONFORMS TO  
THE EUROPEAN UNION DIRECTIVES  
2011/65/EU FOR RoHS COMPLIANCY.



EDAC INC  
TORONTO, ONTARIO  
CANADA  
YOUR CONNECTION TO QUALITY & SERVICE

THESE DRAWINGS AND SPECIFICATIONS  
ARE THE PROPERTY OF EDAC INC., AND  
SHALL NOT BE REPRODUCED, OR COPIED  
OR USED AS THE BASIS FOR THE  
MANUFACTURE OR SALE OF APPARATUS  
WITHOUT WRITTEN PERMISSION.