
TOLERANCE UNLESS OTHERWISE SPECIFIED .X ±0.25 .XX ±0.13


.XXX ±0.05


THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.




ISSUE NUMBER ORIGINAL



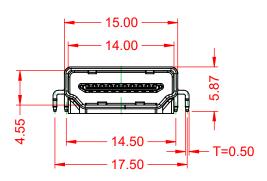



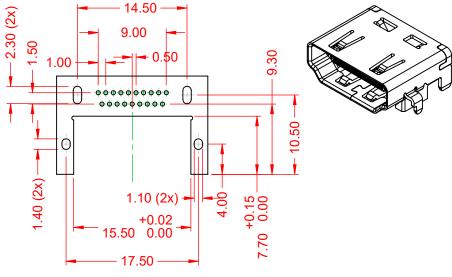

NOTE:

ELECTRICAL SPECIFICATIONS:

CURRENT RATING: 0.5A **VOLTAGE RATING:** 40V

CONTACT RESISTANCE: 10mΩ MAX.

DIELECTRIC WITHSTANDING VOLTAGE: 500V AC/ 1 MINUTE

INSULATOR RESISTANCE:

A) UNMATED $100M\Omega$ min. @ 500 VDC 10M min. @ 150 VDC B) MATED -20°C~85°C

OPERATING TEMPERATURE: STORAGE TEMPERATURE: -20°C~65°C

MATERIAL & FINISH:

SHELL: STAINLESS STEEL, NICKEL PLATED **HOUSING**: LCP, BLACK IN COLOUR, UL94V-0 CONTACTS: COPPER ALLOY, 5µ" GOLD PLATED

0.28 50 9.00



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

690 SERIES RECEPTACLES HDMI TYPE-A MID-MOUNT PCB



EDAC INC TORONTO, ONTARIO CANADA

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC..AND SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

	ACAD REFERENCE NO.: 694C119-X53-011		
	DRAWN: C.B	DATE: January 6, 202	21
	CHECKED:	DATE:	
	SCALE: 2:1	SHEET 1 OF	1
	DRAWING NUMBER: 604C110 V52 011		CLIE

DRAWING NUMBER: 694C119-X53-011 ISSUE 694C119-153-011 PART NUMBER: