



TOLEF	11113	
NLESS OTHERWISE SPECIFIED		DO N
.X	±0.25	
.XX	±0.15	
VVV	10.05	1








ISSUE NUMBER
ORIGINAL


 \emptyset 0.55 (19x)

.XXX ±0.05 .XXXX ±0.02	
	9.00
	1.00

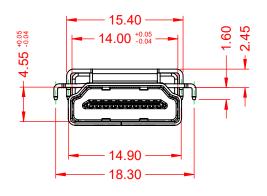

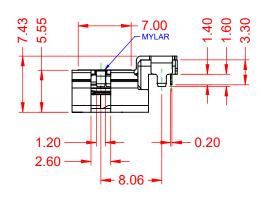

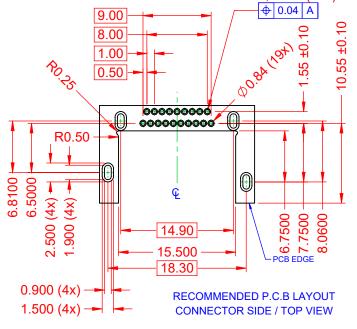

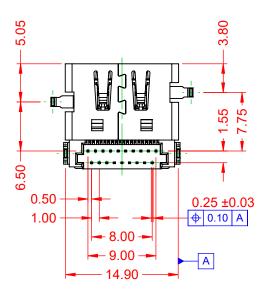

NOTE:

ELECTRICAL SPECIFICATIONS:

CURRENT RATING: 0.5A VOLTAGE RATING: 40V AC CONTACT RESISTANCE: $30m\Omega$ MAX.

DIELECTRIC WITHSTANDING

VOLTAGE:

500V AC/ 1 MINUTE

INSULATOR RESISTANCE:

A) UNMATED:

D: 100MΩ min. @ 500 VDC

B) MATED: 10M min. @ 150 VDC

OPERATING TEMPERATURE: -20°C~85°C STORAGE TEMPERATURE: -20°C~65°C

MATERIAL & FINISH:

SHELL: COPPER ALLOY, NICKEL PLATED HOUSING: LCP, BLACK IN COLOUR, UL94V-0 CONTACTS: COPPER ALLOY, 15µ" GOLD PLATED

HDMI TYPE A RECEPTACLE - MID-MOUNT

THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

ACAD REFERENCE NO.: 694C519-X53-011					
DRAWN: C.B	DATE: January 5, 2021				
CHECKED:	DATE:				
SCALE: 2:1	SHEET 1 OF 1				
DD 444/140 AU IMPED					

DRAWING NUMBER:	694C519-X53-011	ISSUE	
PART NUMBER:	694C519-553-011	1	