

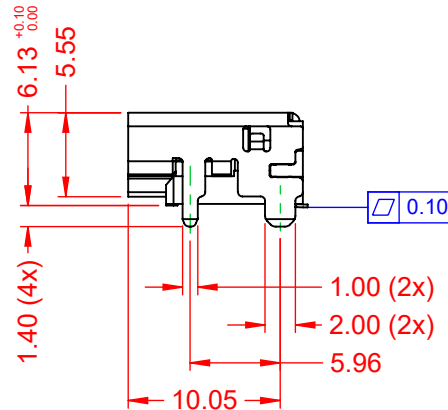

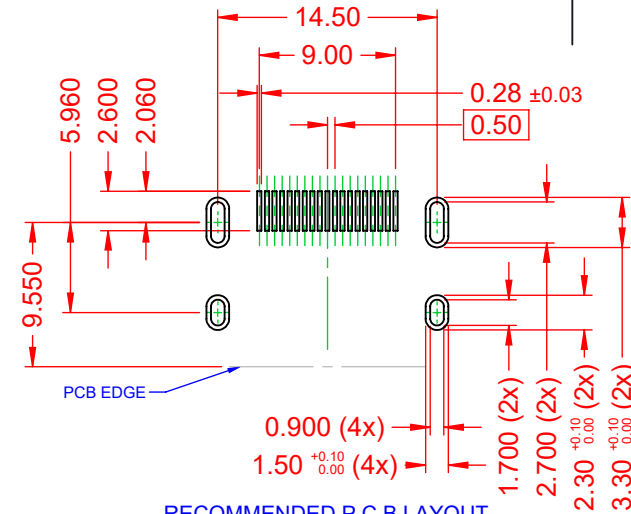


TOLERANCE UNLESS OTHERWISE SPECIFIED	
.X	±0.25
.XX	±0.15
.XXX	±0.05

THIS IS A C.A.D. GENERATED DRAWING  
DO NOT MAKE MANUAL REVISIONS TO MASTER.




ISSUE NUMBER  
ORIGINAL 1



**NOTE:**  
**ELECTRICAL SPECIFICATIONS:**  
 CURRENT RATING: 0.5A  
 VOLTAGE RATING: 40V AC  
 CONTACT RESISTANCE: 10mΩ MAX.  
 DIELECTRIC WITHSTANDING  
 VOLTAGE: 500V AC/ 1 MINUTE  
 INSULATOR RESISTANCE:  
 A) UNMATED: 100MΩ min. @ 500 VDC  
 B) MATED: 10M min. @ 150 VDC  
 OPERATING TEMPERATURE: -20°C~85°C  
 STORAGE TEMPERATURE: -20°C~65°C

**MATERIAL & FINISH:**  
 SHELL: COPPER ALLOY, NICKEL PLATED  
 HOUSING: LCP, BLACK IN COLOUR, UL94V-0  
 CONTACTS: COPPER ALLOY, GOLD FLASH PLATED

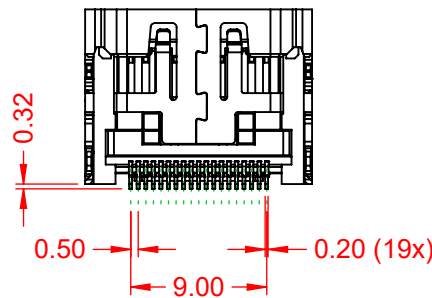

### HDMI TYPE A RECEPTACLE - RIGHT ANGLE SMT

ACAD REFERENCE NO.: 694D119-X63-011	
DRAWN: C.B	DATE: January 8, 2021
CHECKED:	DATE:
SCALE: 2:1	SHEET 1 OF 1
DRAWING NUMBER: 694D119-X63-011	ISSUE
PART NUMBER: 694D119-263-011	1



THIS SERIES FULLY CONFORMS TO  
THE EUROPEAN UNION DIRECTIVES  
2011/65/EU FOR RoHS COMPLIANCY.



EDAC INC  
TORONTO, ONTARIO  
CANADA  
YOUR CONNECTION TO QUALITY & SERVICE

THESE DRAWINGS AND SPECIFICATIONS  
ARE THE PROPERTY OF EDAC INC., AND  
SHALL NOT BE REPRODUCED, OR COPIED  
OR USED AS THE BASIS FOR THE  
MANUFACTURE OR SALE OF APPARATUS  
WITHOUT WRITTEN PERMISSION.