


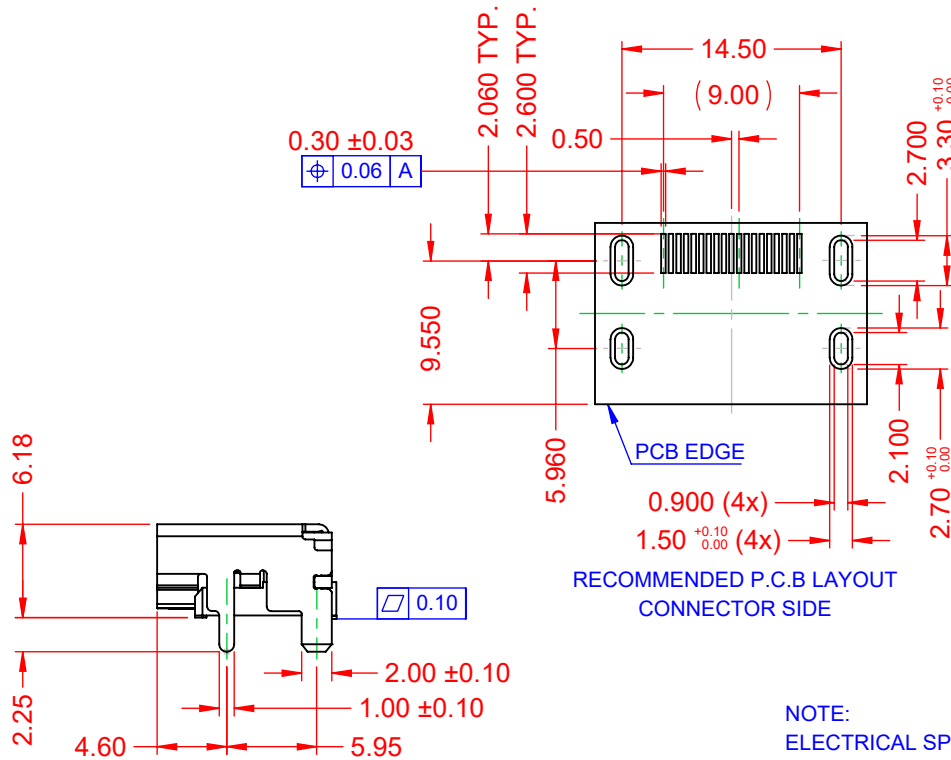
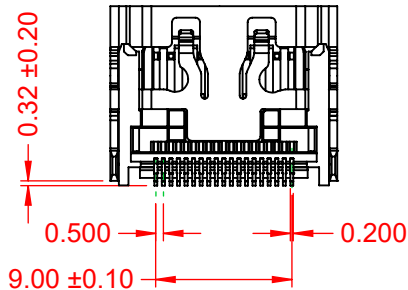


TOLERANCE UNLESS OTHERWISE SPECIFIED	
.X	±0.25
.XX	±0.13
.XXX	±0.05

THIS IS A C.A.D. GENERATED DRAWING
DO NOT MAKE MANUAL REVISIONS TO MASTER.

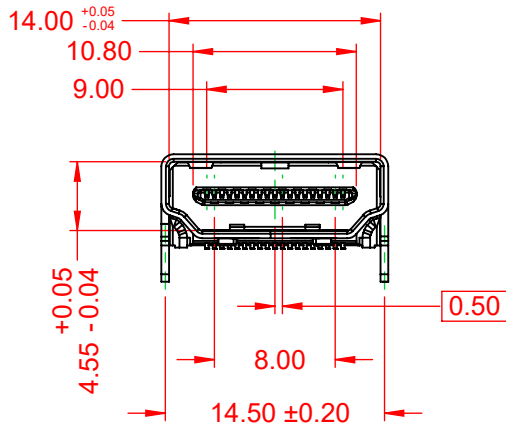

ISSUE NUMBER	
ORIGINAL	①

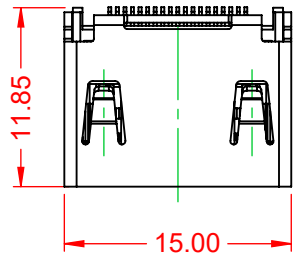

NOTE:
ELECTRICAL SPECIFICATIONS:
 CURRENT RATING: 0.5A
 VOLTAGE RATING: 40V
 CONTACT RESISTANCE: 10mΩ MAX.
 DIELECTRIC WITHSTANDING VOLTAGE: 500V AC/ 1 MINUTE
 INSULATOR RESISTANCE:
 A) UNMATED 100MΩ min. @ 500 VDC
 B) MATED 10M min. @ 150 VDC
 OPERATING TEMPERATURE: -20°C~85°C
 STORAGE TEMPERATURE: -20°C~65°C

MATERIAL & FINISH:
 SHELL: COPPER ALLOY, NICKEL PLATED
 HOUSING: LCP, BLACK IN COLOUR, UL94V-0
 CONTACTS: COPPER ALLOY, GOLD FLASH PLATED

690 SERIES RECEPTACLES HDMI TYPE-A R/ANGLE SMT - STANDARD		ACAD REFERENCE NO.: 694D119-X65-011	
		DRAWN: C.B	DATE: December 30, 2020
CHECKED:	DATE:	SCALE: 2:1	SHEET 1 OF 1
DRAWING NUMBER: 694D119-X65-011		ISSUE	
PART NUMBER: 694D119-265-011		1	

RoHS COMPLIANT
 THIS SERIES FULLY CONFORMS TO
 THE EUROPEAN UNION DIRECTIVES
 2011/65/EU FOR RoHS COMPLIANCY.

EDAC INC
 TORONTO, ONTARIO
 CANADA
 YOUR CONNECTION TO QUALITY & SERVICE

THESE DRAWINGS AND SPECIFICATIONS
 ARE THE PROPERTY OF EDAC INC., AND
 SHALL NOT BE REPRODUCED, OR COPIED
 OR USED AS THE BASIS FOR THE
 MANUFACTURE OR SALE OF APPARATUS
 WITHOUT WRITTEN PERMISSION.