






THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.







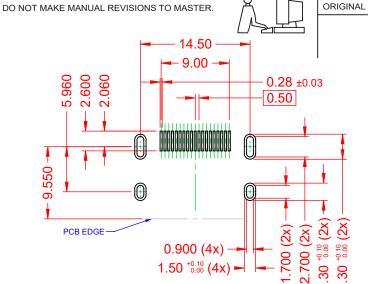

RECOMMENDED P.C.B LAYOUT **CONNECTOR SIDE / TOP VIEW**

NOTE:

THIS IS A C.A.D. GENERATED DRAWING

ELECTRICAL SPECIFICATIONS:

0.5A **CURRENT RATING: VOLTAGE RATING:** 40V AC **CONTACT RESISTANCE:** $10m\Omega$ MAX.

DIELECTRIC WITHSTANDING

VOLTAGE: 500V AC/ 1 MINUTE

INSULATOR RESISTANCE:

A) UNMATED: 100MΩ min. @ 500 VDC B) MATED: 10M min. @ 150 VDC

-20°C~85°C

OPERATING TEMPERATURE: STORAGE TEMPERATURE: -20°C~65°C

MATERIAL & FINISH:

SHELL: COPPER ALLOY, NICKEL PLATED **HOUSING:** LCP, BLACK IN COLOUR, UL94V-0 CONTACTS: COPPER ALLOY, 15µ" GOLD PLATED

HDMI TYPE A RECEPTACLE - RIGHT ANGLE SMT



EDAC INC TORONTO, ONTARIO CANADA

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC..AND SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

ACAD REFERENCE NO.: 694D119-X63-011	
DRAWN: C.B	DATE: January 8, 2021
CHECKED:	DATE:
SCALE: 2:1	SHEET 1 OF 1
DRAWING NUMBER: 694D119-X63-011 ISSUE	

DRAWING NUMBER: 0940119-203-011 ISSUE 694D119-563-011 PART NUMBER:

ISSUE NUMBER

(1)