



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.



.XXX ±0.05

- 0.60 ±0.10


− 1.00 ±0.10 (4x)


□ 0.10

THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER ORIGINAL

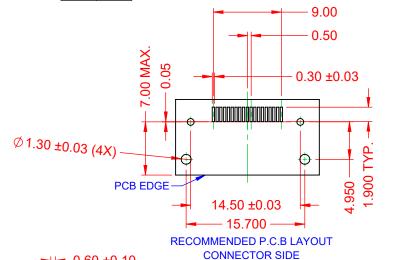



NOTE:

ELECTRICAL SPECIFICATIONS:

CURRENT RATING: 0.5A **VOLTAGE RATING:** 40V

CONTACT RESISTANCE: $10m\Omega$ MAX.

DIELECTRIC WITHSTANDING VOLTAGE: 300V AC/ 1 MINUTE

INSULATOR RESISTANCE:

A) UNMATED $100M\Omega$ min. @ 500 VDC B) MATED 10M min. @ 150 VDC

OPERATING TEMPERATURE: -20°C~85°C STORAGE TEMPERATURE: -20°C~65°C

MATERIAL & FINISH:

SHELL: STEEL, NICKEL PLATED

HOUSING: LCP, BLACK IN COLOUR, UL94V-0 CONTACTS: COPPER ALLOY, 10µ" GOLD PLATED

690 SERIES RECEPTACLES HDMI TYPE-A R/A SMT - M3 MOUNTING



6.18

.10 (4x)

EDAC INC TORONTO, ONTARIO CANADA

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC..AND SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

	ACAD REFERENCE NO.: 694E119-X62-611	
	DRAWN: C.B	DATE: January 4, 2021
	CHECKED:	DATE:
	SCALE: 2:1	SHEET 1 OF 1
	DDAMING NUMBER - 604E440 V62 644	

DRAWING NUMBER: 694E119-X62-611 ISSUE 694E119-362-611 PART NUMBER: