
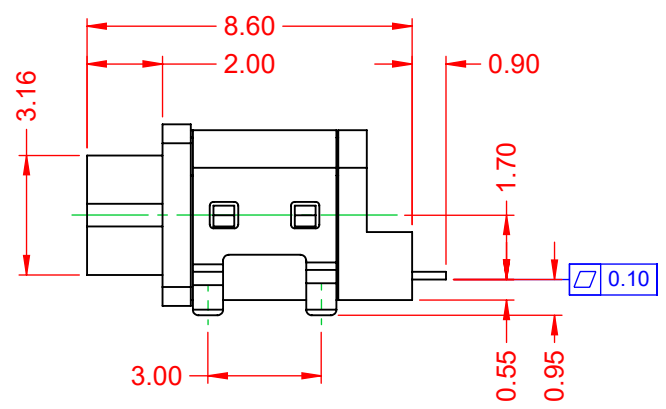
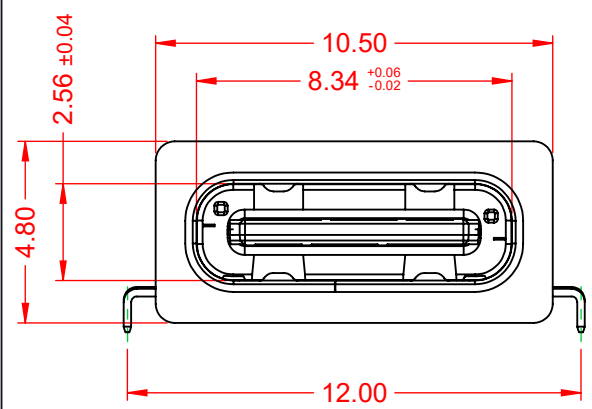
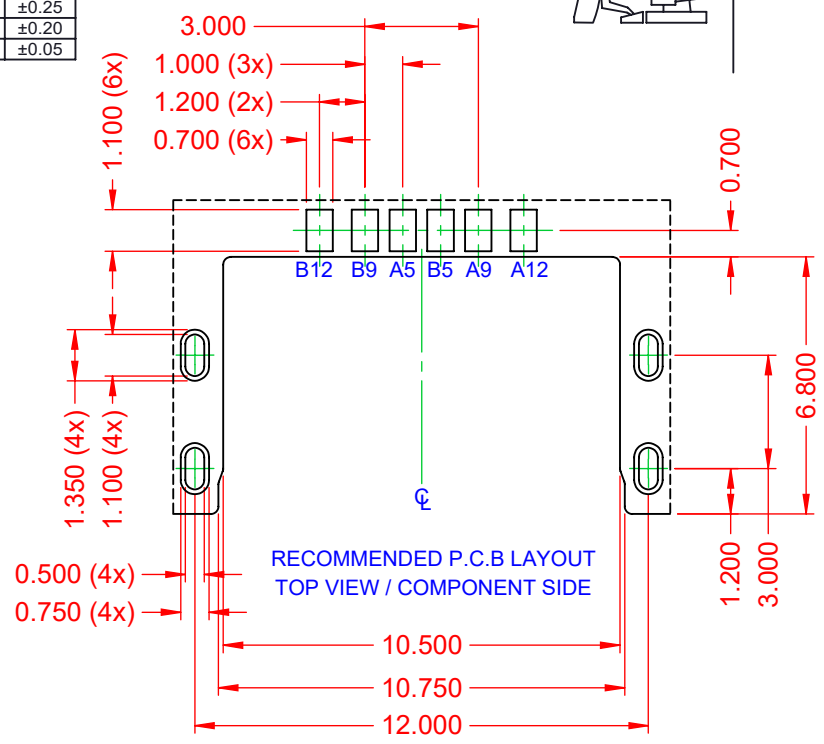
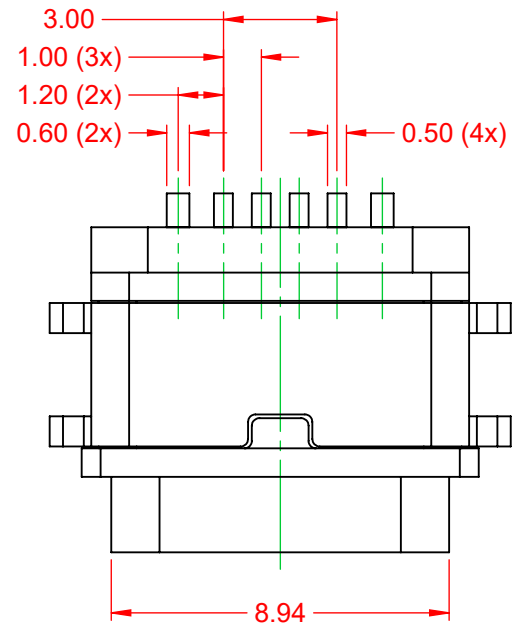


THIS IS A C.A.D. GENERATED DRAWING
DO NOT MAKE MANUAL REVISIONS TO MASTER.

TOLERANCE UNLESS OTHERWISE SPECIFIED	
.X	±0.25
.XX	±0.20
.XXX	±0.05



NOTE:
ELECTRICAL SPECIFICATIONS:
 CURRENT RATING: 3A
 CONTACT RESISTANCE: 40mΩ MAX.
 INSULATOR RESISTANCE: 100MΩ min.
 DIELECTRIC WITHSTANDING VOLTAGE: 100V AC
 OPERATING TEMPERATURE: -40°C ~ 85°C

PIN	SIGNAL
B12	GND
B9	VBUS
B5	CC2
A5	CC1
A9	VBUS
A12	GND

MATERIAL & FINISH:
 SHELL: STAINLESS STEEL, NICKEL PLATED
 HOUSING: LCP, BLACK IN COLOUR, UL94V-0
 CONTACTS: COPPER ALLOY, GOLD FLASH PLATED



THIS SERIES FULLY CONFORMS TO
THE EUROPEAN UNION DIRECTIVES
2011/65/EU FOR RoHS COMPLIANCY.

EDAC EDAC INC
TORONTO, ONTARIO
CANADA
YOUR CONNECTION TO QUALITY & SERVICE

THESE DRAWINGS AND SPECIFICATIONS
ARE THE PROPERTY OF EDAC INC., AND
SHALL NOT BE REPRODUCED, OR COPIED
OR USED AS THE BASIS FOR THE
MANUFACTURE OR SALE OF APPARATUS
WITHOUT WRITTEN PERMISSION.

<p align="center">USB TYPE-C 6 PIN - WATER RESISTANT RIGHT ANGLE SMT</p>		ACAD REFERENCE NO.: 698A106WX82-611	
		DRAWN: C.B	DATE: February 16, 2021
CHECKED:		DATE:	
SCALE: 5:1		SHEET 1 OF 1	
DRAWING NUMBER: 698A106WX82-611			ISSUE
PART NUMBER: 698A106W282-611			1