
**TOLERANCE** UNLESS OTHERWISE SPECIFIED .X ±0.25 .XX ±0.13


.XXX ±0.05


THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.





ISSUE NUMBER **ORIGINAL** 








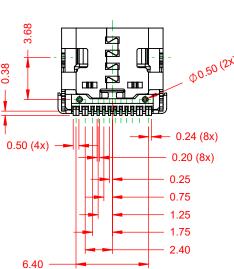





## NOTE:

**ELECTRICAL SPECIFICATIONS:** 

**CURRENT RATING:** 5A MAX. **CONTACT RESISTANCE:**  $40m\Omega$  MAX. **INSULATOR RESISTANCE:**  $100M\Omega$  min. DIELECTRIC WITHSTANDING VOLTAGE: 100V AC **OPERATING TEMPERATURE:** -40°C ~ 85°C

## MATERIAL & FINISH:

SHELL: STAINLESS STEEL, NICKEL PLATED **HOUSING:** LCP, BLACK IN COLOUR, UL94V-0 CONTACTS: COPPER ALLOY, 15µ" GOLD PLATED

## 690 SERIES RECEPTACLES USB TYPE-C 16 PIN OPTION



EDAC INC TORONTO, ONTARIO CANADA

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC..AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

	ACAD REFERENCE NO.: 698B116-X64-211		
	DRAWN: C.B	DATE: December	22, 2020
	CHECKED:	DATE:	
	SCALE: 3:1	SHEET 1 OF	2
	DDAWING NUMBER: 608B116 Y64 211		ICCLIE

DRAWING NUMBER: 698B116-X64-211 ISSUE 698B116-564-211 PART NUMBER:




THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY. TOLERANCE UNLESS OTHERWISE SPECIFIED .X ±0.25 .XX ±0.13

.XXX ±0.05

THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER ORIGINAL

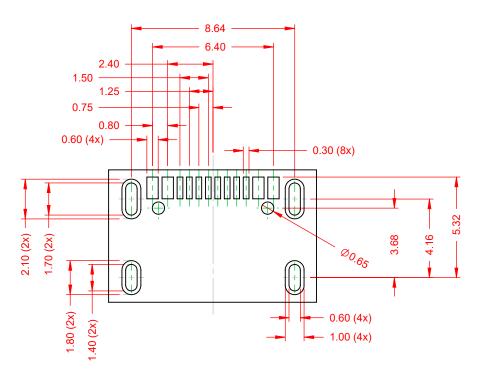

RECOMMENDED P.C.B LAYOUT TOLERANCE: ±0.05mm

## 690 SERIES RECEPTACLES USB TYPE-C 16 PIN OPTION PCB

YOUR CONNECTION TO QUALITY & SERVICE

EDAC INC TORONTO, ONTARIO CANADA

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC..AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

ACAD REFERENCE NO.: 6988	3116-X64-211		
DRAWN: C.B	DATE: December 22, 2020		
CHECKED:	DATE:		
SCALE: 3:1	SHEET 2 OF 2		
DRAMING NUMBER: 600B116 V64 211			

DRAWING NUMBER: 698B116-X64-211 ISSUE PART NUMBER: 698B116-564-211