


TOLERANCE UNLESS OTHERWISE SPECIFIED	
.X	±0.25
.XX	±0.13
.XXX	±0.05

THIS IS A C.A.D. GENERATED DRAWING
DO NOT MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER	
ORIGINAL	①

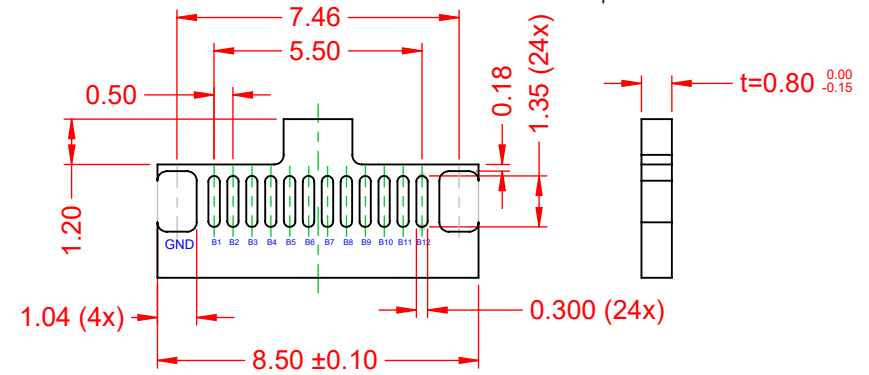

TOP AND BOTTOM SIDE
RECOMMENDED P.C.B.A (TOLERANCE:±0.05mm)

NOTE:

ELECTRICAL SPECIFICATIONS:

CURRENT RATING: 5A FOR VBUS PIN; 1.25A FOR VCONN
 CONTACT RESISTANCE: 40mΩ MAX.
 INSULATOR RESISTANCE: 1000MΩ min. 500V DC
 DIELECTRIC WITHSTANDING VOLTAGE: 100V AC
 OPERATING TEMPERATURE: -40°C ~ 85°C

MATERIAL & FINISH:

SHELL: STAINLESS STEEL, T=0.15, NICKEL PLATED
 HOUSING: LCP, BLACK IN COLOUR, UL94V-0
 CONTACTS: COPPER ALLOY, T=0.15, GOLD FLASH PLATED



THIS SERIES FULLY CONFORMS TO
THE EUROPEAN UNION DIRECTIVES
2011/65/EU FOR RoHS COMPLIANCY.



YOUR CONNECTION TO QUALITY & SERVICE

EDAC INC
TORONTO, ONTARIO
CANADA

THESE DRAWINGS AND SPECIFICATIONS
ARE THE PROPERTY OF EDAC INC., AND
SHALL NOT BE REPRODUCED, OR COPIED
OR USED AS THE BASIS FOR THE
MANUFACTURE OR SALE OF APPARATUS
WITHOUT WRITTEN PERMISSION.

691 SERIES PLUGS USB TYPE-C 24 PIN OPTION

ACAD REFERENCE NO.: 699C124-XA5-111	
DRAWN: C.B	DATE: December 21, 2020
CHECKED:	DATE:
SCALE: 5:1	SHEET 1 OF 1
DRAWING NUMBER: 699C124-XA5-111	ISSUE
PART NUMBER: 699C124-2A5-111	1