
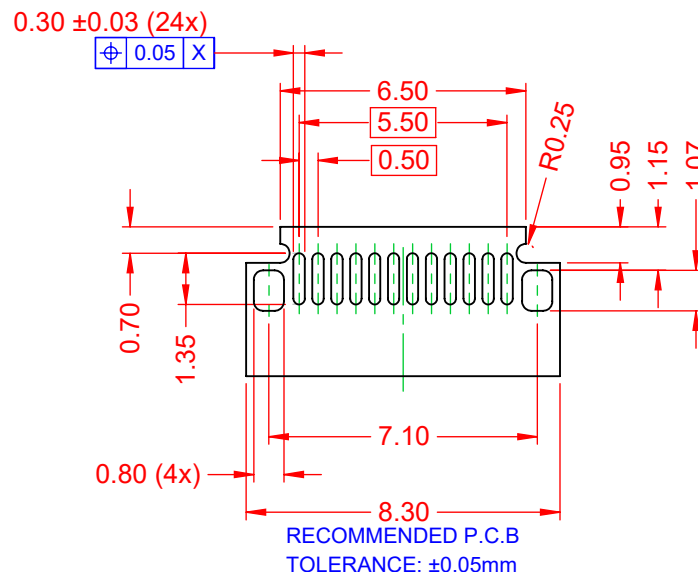
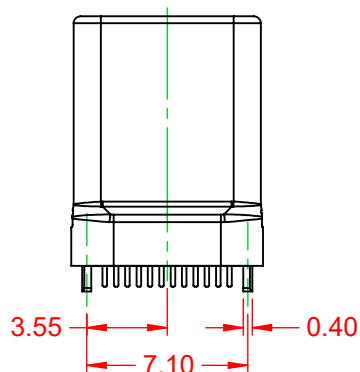

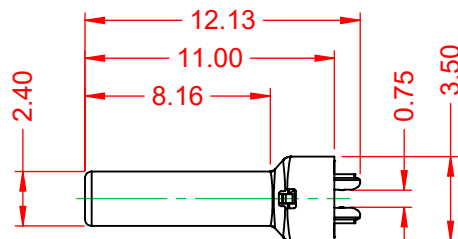
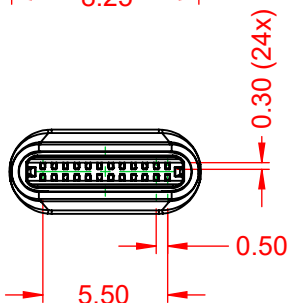
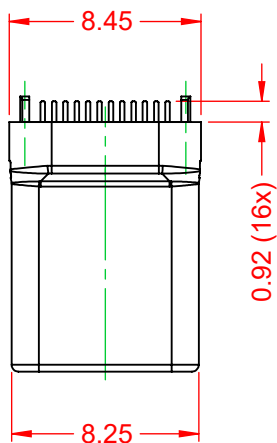


TOLERANCE UNLESS OTHERWISE SPECIFIED	
.X	±0.25
.XX	±0.13
.XXX	±0.05

THIS IS A C.A.D. GENERATED DRAWING  
DO NOT MAKE MANUAL REVISIONS TO MASTER.



**NOTE:**  
**ELECTRICAL SPECIFICATIONS:**  
**CURRENT RATING:** 10A FOR VBUS PIN;  
 1.25A FOR VCONN  
**CONTACT RESISTANCE:** 40mΩ MAX.  
**INSULATOR RESISTANCE:** 1000MΩ min. 500V DC  
**DIELECTRIC WITHSTANDING VOLTAGE:** 300V AC  
**OPERATING TEMPERATURE:** -40°C ~ 85°C

**MATERIAL & FINISH:**  
**SHELL:** STAINLESS STEEL, NICKEL PLATED  
**HOUSING:** LCP, BLACK IN COLOUR, UL94V-0  
**CONTACTS:** COPPER ALLOY, GOLD FLASH PLATED



THIS SERIES FULLY CONFORMS TO  
THE EUROPEAN UNION DIRECTIVES  
2011/65/EU FOR RoHS COMPLIANCY.



YOUR CONNECTION TO QUALITY & SERVICE

EDAC INC  
TORONTO, ONTARIO  
CANADA

THESE DRAWINGS AND SPECIFICATIONS  
ARE THE PROPERTY OF EDAC INC., AND  
SHALL NOT BE REPRODUCED, OR COPIED  
OR USED AS THE BASIS FOR THE  
MANUFACTURE OR SALE OF APPARATUS  
WITHOUT WRITTEN PERMISSION.

691 SERIES PLUGS USB TYPE-C 24 PIN OPTION

ACAD REFERENCE NO.: 699C124-XA6-111	
DRAWN: C.B	DATE: December 21, 2020
CHECKED:	DATE:
SCALE: 5:1	SHEET 1 OF 1
DRAWING NUMBER: 699C124-XA6-111	ISSUE
PART NUMBER: 699C124-2A6-111	1