
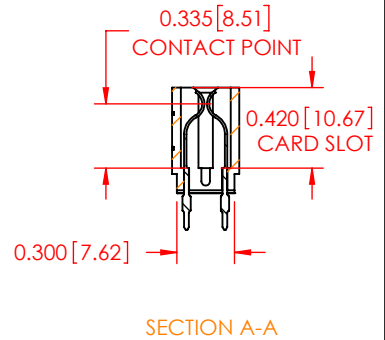
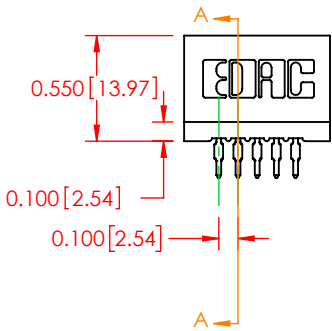


REVISIONS			
REV.	DESCRIPTION	DATE	BY
1	ORIGINAL	DRAWN DATE	

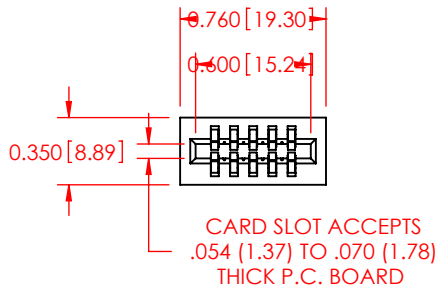

SPECIFICATIONS

CURRENT RATING: 3A
 WITHSTANDING VOLTAGE: 1200VAC
 INSULATION RESISTANCE: 5000 MΩ MIN.
 CONTACT RESISTANCE: 10 mΩ MAX.
 TEMPERATURE RANGE: -40 °C TO 105 °C

INSULATOR MATERIAL: PPS
 INSULATOR COLOR: BLACK
 CONTACT MATERIAL: COPPER ALLOY
 CONTACT PLATING: 30μ" SELECTIVE GOLD
 TERMINATION TYPE: P.C.TAIL
 TAIL LENGTH: 4.83MM



EDAC	DRAWN BY	J.S.M		725 SERIES, PRESSFIT CARD EDGE CONNECTOR, 2.54 PITCH, 10 POSITIONS					
	DRAWN DATE	12/09/2025							
	CHECKED BY	V.K		PART NUMBER	725-010-525-201				
	CHECK DATE	12/09/2025							
RoHS COMPLIANT	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC, AND SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.		TOLERANCES		ALL DIMENSIONS AND TOLERANCES IN MM	MATERIAL	PPS	SIZE	A
			.X	±0.30		NOTES:			REVISION
			.XX	±0.25					1
			.XXX	±0.10		SCALE	1:1	SHEET	1 OF 1