
Mounting Option

.344 (8.74) Offset Card Guides

Contact Detail

90 Degree Bend (Code 521 Contacts)

.156 [3.96] Contact Spacing x .200 [5.08] Row Spacing

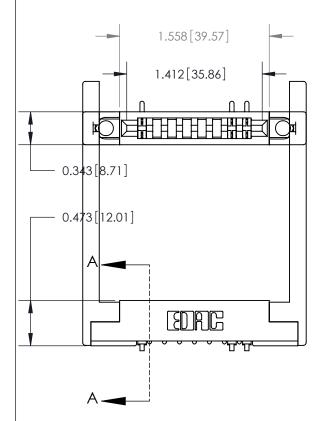

807 Series High Temp Card Edge Connector

Part Number: 807-008-553-168

YOUR CONNECTION TO QUALITY & SERVICE

807 ENG MASTER J.LEE DATE: AUG. 11/09 SHEET 1 OF 4 NTS

SEGTION A-A

807 Assembly









See	Acco	mp	anyin	g Pa	ges fo

- **Contact Bend Details**
- **Mounting Options**
- **Features and Specifications**





ISSUE NUMBE

ORIGINAL



Features

- CSA Approved and UL Recognized
- .156 (3.96) Contact Spacing x .200 (5.08) Row Spacing
- Accepts .062 (1.57) Nominal Thickness P.C. Board
- Low Profile Insulator Body .473 (12.01), with Card Guides
- Contact Termination Options include P.C. Tail, Wire Hole, Wire Wrap, 90 Degree & Extender Board Bends
- Single or Dual Row Configurations
- Large Variety of Mounting Options
- Pre-assembled Card Guides Available
- Accepts Between Contact and In-Contact Polarizing Keys

Specifications

- Insulator Material: DAP
- Contact Material: Copper, Nickel, Tin Alloy CA-725
- Contact Plating: Gold on the Mating Area, Tin on the Contact Tails, Nickel Underplate
- Current Rating: 5 Amperes Continuous
- Contact Resistance: 10 Milliohms Maximum
- Dielectric Withstanding Voltage: 1800 V AC rms at Sea Level Between Adjacent Contacts
- Insulation Resistance: 5000 Megohms Minimum
- Operating Temperature: -65 to +165 °C
- Insertion Force: 16 oz (4.45 N) Maximum per Contact Pair when Tested with a .070 (1.78) Thick Gauge
- Withdrawal Force: 1 oz (0.28 N) Minimum per Contact Pair when Tested with a .054 (1.37) Thick Gauge

807 Series High Temp Card I	ACAD REFERENCE NO. 807 ENG MASTER					
Features and Specifications	DRAWN:	J.LEE	DATE: AU	G. 11/09		
realities and specifications			CHECKED:		DATE:	
EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR LISED AS THE BASIS FOR THE	SCALE:	NTS	SHEET .	4 OF 4	
TORONTO, ONTARIO		DRAWING	NUMBER		ISSUE	
YOUR CONNECTION TO QUALITY & SERVICE	MANUFACTURE OR SALE OF APPARATUS	8	07 Assembly		1	