
**Mounting Option** 

.344 (8.74) Offset Card Guides

## **Contact Detail**

PC Tail .046x.013(1.17x0.33) - Tail LG=.213(5.41)

.156 [3.96] Contact Spacing x .200 [5.08] Row Spacing

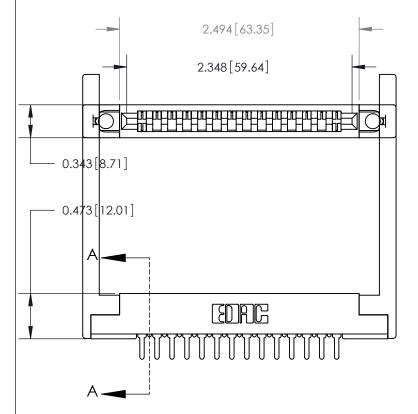

S IS A C.A.D. GENERATED DRAWING
NOT MAKE MANUAL REVISIONS TO MASTER:

ISSUE NUMBER

ORIGINAL

807 ENG MASTER

DATE: AUG. 11/09

SHEET 1 OF 4

.095 [2.41] Point of Contact (Measured from bottom of Card Slot)

Card Slot Accepts .054 [1.37] to .070 [1.78] Thick P.C. Board

## **See Accompanying Pages for:**

- Contact Bend Details
- Mounting Options
- Features and Specifications

807 Series High Temp Card Edge Connector Part Number: 807-028-520-268



TORONTO, ONTARIO CANADA

CANADA OR USED AS THE BASIS FOR MANUFACTURE OR SALE OF AF WITHOUT WRITTEN PERMISSION.

0	DRAWN. J.LEE			
58	CHECKED:			
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INCAND	SCALE: NTS			
SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE	DRAWING NUMBER			
MANUFACTURE OR SALE OF APPARATUS	807 Assembly			





ISSUE NUMBE

ORIGINAL



## **Features**

- CSA Approved and UL Recognized
- .156 (3.96) Contact Spacing x .200 (5.08) Row Spacing
- Accepts .062 (1.57) Nominal Thickness P.C. Board
- Low Profile Insulator Body .473 (12.01), with Card Guides
- Contact Termination Options include P.C. Tail, Wire Hole, Wire Wrap, 90 Degree & Extender Board Bends
- Single or Dual Row Configurations
- Large Variety of Mounting Options
- Pre-assembled Card Guides Available
- Accepts Between Contact and In-Contact Polarizing Keys

## **Specifications**

- Insulator Material: DAP
- Contact Material: Copper, Nickel, Tin Alloy CA-725
- Contact Plating: Gold on the Mating Area, Tin on the Contact Tails, Nickel Underplate
- Current Rating: 5 Amperes Continuous
- Contact Resistance: 10 Milliohms Maximum
- Dielectric Withstanding Voltage: 1800 V AC rms at Sea Level Between Adjacent Contacts
- Insulation Resistance: 5000 Megohms Minimum
- Operating Temperature: -65 to +165 °C
- Insertion Force: 16 oz (4.45 N) Maximum per Contact Pair when Tested with a .070 (1.78) Thick Gauge
- Withdrawal Force: 1 oz (0.28 N) Minimum per Contact Pair when Tested with a .054 (1.37) Thick Gauge

807 Series High Temp Card Edge Connector Features and Specifications		ACAD REFERENCE NO. 807 ENG MASTER			
		DRAWN:	J.LEE	DATE: AU	G. 11/09
		CHECKED:		DATE:	
EDAC INC	THESE DRAWINGS AND SPECIFICATIONS	SCALE:	NTS	SHEET .	4 OF 4
TORONTO, ONTARIO	ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE	DRAWING	NUMBER		ISSUE
YOUR CONNECTION TO QUALITY & SERVICE	MANUFACTURE OR SALE OF APPARATUS	8	07 Assembly		1