




ISSUE NUMBER	
ORIGINAL	①
ADD SPECIFICATION NOTE	
P.M. DEC. 13/2019	②
ADD WIRE GAUGE NOTE	
P.M. JUL. 05/2020	③

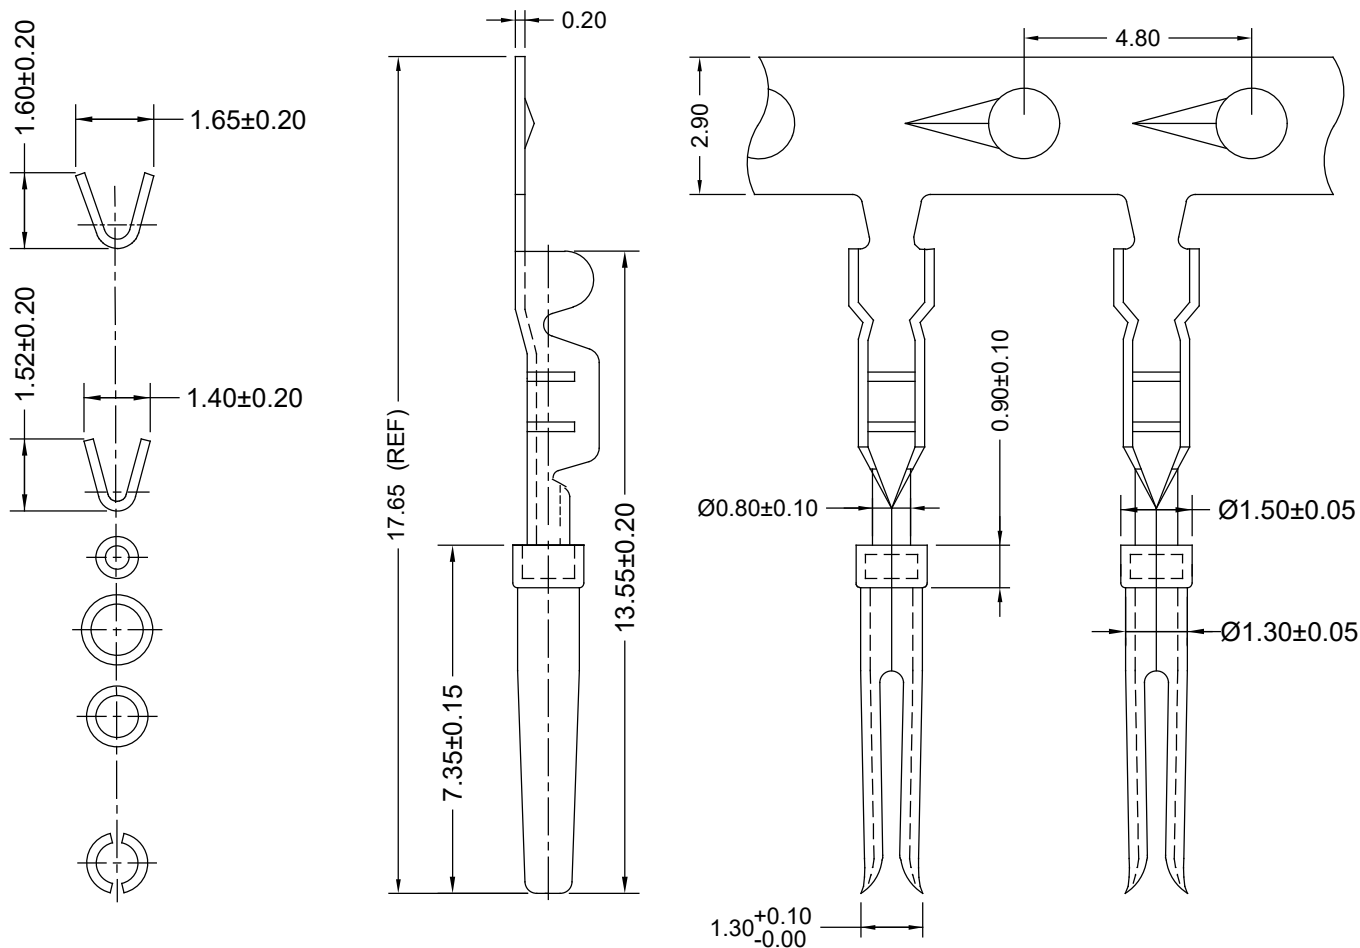

SPECIFICATIONS

1. CURRENT RATING: 3 AMP. PER CONTACT
2. CONTACT RESISTANCE: 25 MILLIOHMS MAX.
3. OPERATING VOLTAGE: 250 VAC MAX.
4. OPERATING TEMPERATURE: -55°C TO +105°C
5. RECOMMENDED WIRE RANGE: 24~28 AWG.

NOTES:

1. MATERIAL: BRASS, C2680-H, T=0.20mm
GOLD PLATING ON MATING AREA,
NICKEL PLATED ON CRIMP AREA

PART NO.	GOLD PLATING
638-292-271	GOLD FLASH PLATING
638-292-371	15u" GOLD PLATING
638-292-671	30u" GOLD PLATING

2. MATCH WITH 638 SERIES CRIMP
LOAD HIGH DENSITY D-SUB CONNECTOR
3. DIMENSION: MM [INCHES]
4. WIRE GAUGE: AWG24-26



THIS SERIES FULLY CONFORMS TO THE
EUROPEAN UNION DIRECTIVES AND
2011/65/EU FOR RoHS COMPLIANCY.

**638 HIGH DENSITY SERIES TERMINAL
CRIMP AND LOAD, SOCKET**

EDAC INC
TORONTO, ONTARIO
CANADA
YOUR CONNECTION TO QUALITY & SERVICE

THESE DRAWINGS AND SPECIFICATIONS
ARE THE PROPERTY OF EDAC INC., AND
SHALL NOT BE REPRODUCED, OR COPIED
OR USED AS THE BASIS FOR THE
MANUFACTURE OR SALE OF APPARATUS
WITHOUT WRITTEN PERMISSION.

ACAD REFERENCE NO.: 638-292-271

DRAWN: R.STA.MONICA DATE: JUN.17/2016

CHECKED: DATE:

PART NUMBER
SEE PART NO. SHEET 1 OF 1

DRAWING NUMBER
638-292-271 ISSUE
3