




THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.




ISSUE NUMBER ORIGINAL

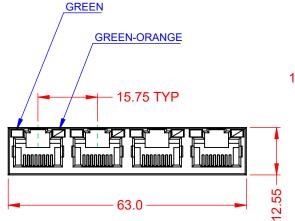



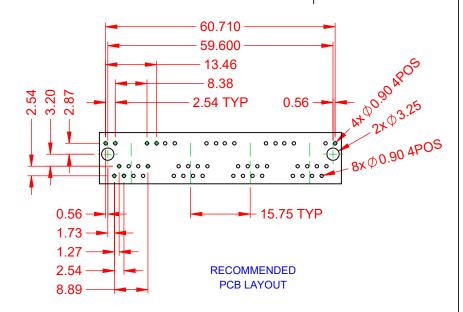

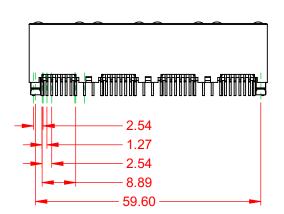

## NOTES:

1. MATERIALS:

**INSULATOR:** NYLON, BLACK, UL 94V-0 CONTACT: PHOSPHOR BRONZE.

SELECT GOLD FLASH PLATING ON CONTACT AREA

TIN ON TAILS OVER NICKEL

2. VOLTAGE RATING: 150 VAC RMS 3. CURRENT RATING: 1.5 AMPS @25°C 4. CONTACT RESISTANCE: 20mΩ MAX

5. INSULATOR RESISTANCE: 1000MΩ MIN @ 500V DC

5. DIELECTRIC WITHSTANDING: 1000V AC CONTACT TO CONTACT

@0.5mA 50Hz OR 60Hz 60s

6. DURABILITY: 750 CYCLES MIN 30N/3.06KG MAX 7. MATING/UNMATING FORCE: 8. RETENTION STRENGTH: 50N MIN FOR 60s ±5s 9. OPERATING TEMP: -40°C TO +85°C

10. STORAGE TEMP: -40°C TO +85°C RELATIVE HUMIDITY <80%

MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.

RJ45, VERTICAL PCB MOUNT, 4 PORTS

## YOUR CONNECTION TO QUALITY & SERVICE

**EDAC INC** TORONTO, ONTARIO CANADA

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC..AND SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

| ACAD REFERENCE NO.: J2W Assembly |       |      |        |          |   |
|----------------------------------|-------|------|--------|----------|---|
| DRAWN: Y.Z                       | DATE: | Nove | mber : | 25, 2019 |   |
| CHECKED:                         | DATE: |      |        |          | _ |
| SCALE: 2:1                       | SHEET | 1    | OF     | 1        | _ |
| DRAWING NUMBER: J2W Assembly     |       |      | ISSUE  | _        |   |

J2W048821N31031

PART NUMBER:

THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.