




THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.




ISSUE NUMBER
ORIGINAL





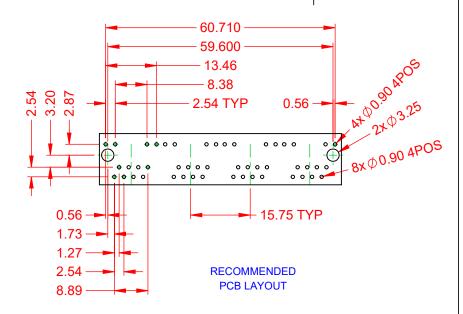



NOTES:

1. MATERIALS:

INSULATOR: NYLON, BLACK, UL 94V-0 CONTACT: PHOSPHOR BRONZE,

SELECT GOLD FLASH PLATING ON CONTACT AREA

TIN ON TAILS OVER NICKEL

VOLTAGE RATING:
 CURRENT RATING:
 AMPS @25°C
 CONTACT RESISTANCE:
 MAX

5. INSULATOR RESISTANCE: 1000MΩ MIN @ 500V DC

5. DIELECTRIC WITHSTANDING: 1000V AC CONTACT TO CONTACT

@0.5mA 50Hz OR 60Hz 60s

6. DURABILITY: 750 CYCLES MIN
7. MATING/UNMATING FORCE: 30N/3.06KG MAX
8. RETENTION STRENGTH: 50N MIN FOR 60s ±5s
9. OPERATING TEMP: -40°C TO +85°C

10. STORAGE TEMP: -40°C TO +85°C RELATIVE HUMIDITY <80%

MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.

RJ45, VERTICAL PCB MOUNT, 4 PORTS

EDAC INC TORONTO, ONTARIO CANADA

YOUR CONNECTION TO QUALITY & SERVICE

THESE DRAWINGS AND SPECIFICATIONS
ARE THE PROPERTY OF EDAC INC.,AND
SHALL NOT BE REPRODUCED,OR COPIED
OR USED AS THE BASIS FOR THE
MANUFACTURE OR SALE OF APPARATUS
WITHOUT WRITTEN PERMISSION.

 ACAD REFERENCE NO.:
 J2W Assembly

 DRAWN:
 Y.Z
 DATE: November 25, 2019

 CHECKED:
 DATE:

 SCALE:
 2:1
 SHEET 1 OF 1

 DRAWING NUMBER:
 J2W Assembly
 ISSUE

J2W048821N41031

PART NUMBER:



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR ROHS COMPLIANCY.