

THIS SERIES FULLY CONFORMS TO

THE EUROPEAN UNION DIRECTIVES

2011/65/EU FOR RoHS COMPLIANCY.


TOLERANCE UNLESS OTHERWISE SPECIFIED .X ±0.25 .XX ±0.13

.XXX ±0.05

THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER ORIGINAL

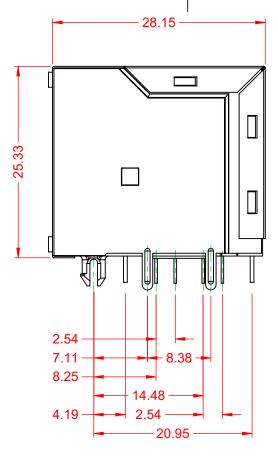

RJ45, 2 PORTS, RIGHT ANGLE PCB MOUNT



EDAC INC TORONTO, ONTARIO CANADA

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC..AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

ACAD REFERENCE NO.: J96 A	assembly
DRAWN: C.B	DATE: January 20, 2020
CHECKED:	DATE:
SCALE: 2:1	SHEET 1 OF 2

ISSUE DRAWING NUMBER: J96 Assembly PART NUMBER: J96028822N22121


TOLERANCE UNLESS OTHERWISE SPECIFIED .X ±0.25 .XX ±0.13

.XXX ±0.05

THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER **ORIGINAL**

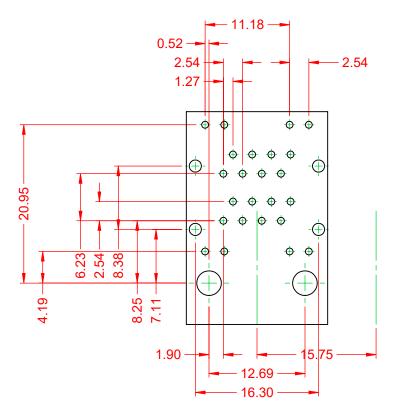

5. DIELECTRIC WITHSTANDING: 1000V AC CONTACT TO CONTACT OR

1500VDC CONTACT TO SCREEN AND TEST PANEL

@0.5mA 50Hz OR 60Hz 60s

6. DURABILITY: 750 CYCLES MIN 7. MATING/UNMATING FORCE: 30N/3.06KG MAX 8. RETENTION STRENGTH: 30N MIN FOR 60s ±5s 9. OPERATING TEMP: -40°C TO +85°C

10. STORAGE TEMP: -40°C TO +85°C RELATIVE HUMIDITY <80%

MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.

NOTES:

1. MATERIALS:

INSULATOR: NYLON, BLACK, UL 94V-0 CONTACT: PHOSPHOR BRONZE,

SELECT GOLD FLASH PLATING ON CONTACT AREA

TIN ON TAILS OVER NICKEL

2. VOLTAGE RATING: 125 VAC RMS 1.5 AMPS @25°C 3. CURRENT RATING: 4. CONTACT RESISTANCE: 20mΩ MAX



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY. RJ45, 2 PORTS, RIGHT ANGLE PCB MOUNT

YOUR CONNECTION TO QUALITY & SERVICE

EDAC INC TORONTO, ONTARIO CANADA

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC..AND SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

ACAD REFERENCE NO.: J96 Assembly		
DRAWN: C.B	DATE: January 20	, 2020
CHECKED:	DATE:	
SCALE: 2:1	SHEET 2 OF	2
DD AMAING NILLIADED 100 Accombine		100115

DRAWING NUMBER: J96 Assembly ISSUE PART NUMBER: J96028822N22121