


THIS SERIES FULLY CONFORMS TO

THE EUROPEAN UNION DIRECTIVES

2011/65/EU FOR RoHS COMPLIANCY.




.XXX ±0.05





ISSUE NUMBER ORIGINAL

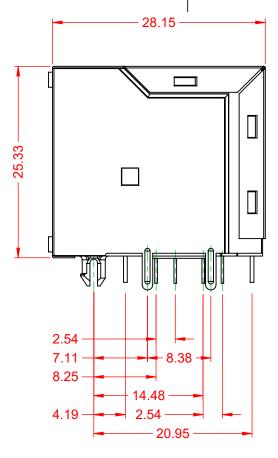

RJ45, 2 PORTS, RIGHT ANGLE PCB MOUNT



EDAC INC TORONTO, ONTARIO CANADA

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC..AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

ACAD REFERENCE NO.: J96 A	ssembly
DRAWN: C.B	DATE: January 20, 2020
CHECKED:	DATE:
SCALE: 2:1	SHEET 1 OF 2

DRAWING NUMBER:	J96 Assembly	ISSUE
PART NUMBER:	J96028822N23121	1


TOLERANCE UNLESS OTHERWISE SPECIFIED .X ±0.25 .XX ±0.13

.XXX ±0.05

THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER ORIGINAL

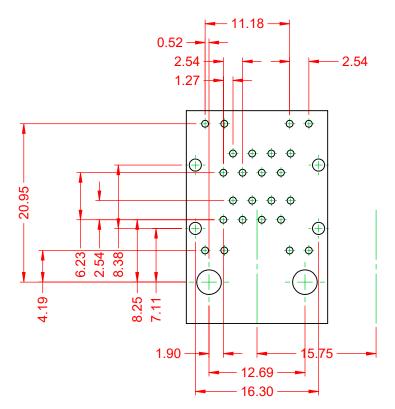

5. DIELECTRIC WITHSTANDING: 1000V AC CONTACT TO CONTACT OR

1500VDC CONTACT TO SCREEN AND TEST PANEL

@0.5mA 50Hz OR 60Hz 60s

ACAD REFERENCE NO.:

6. DURABILITY: 750 CYCLES MIN 7. MATING/UNMATING FORCE: 30N/3.06KG MAX 8. RETENTION STRENGTH: 30N MIN FOR 60s ±5s 9. OPERATING TEMP: -40°C TO +85°C

10. STORAGE TEMP: -40°C TO +85°C RELATIVE HUMIDITY <80%

MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.

1.5 AMPS @25°C 3. CURRENT RATING:

SELECT GOLD FLASH PLATING ON CONTACT AREA

NYLON, BLACK, UL 94V-0

TIN ON TAILS OVER NICKEL

PHOSPHOR BRONZE,

125 VAC RMS

4. CONTACT RESISTANCE: 20mΩ MAX

NOTES:

1. MATERIALS:

INSULATOR:

CONTACT:

2. VOLTAGE RATING:

RJ45, 2 PORTS, RIGHT ANGLE PCB MOUNT

DRAWN: C.B DATE: January 20, 2020 CHECKED: 2 SCALE: 2:1 SHEET 2 OF DRAWING NUMBER: **ISSUE**

J96 Assembly

THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.



EDAC INC TORONTO, ONTARIO CANADA

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC..AND SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

J96 Assembly PART NUMBER: J96028822N23121