


YOUR CONNECTION TO QUALITY & SERVICE

2011/65/EU FOR RoHS COMPLIANCY.

COMPLIANT

DRAWING NUMB OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS PART NUMBER: WITHOUT WRITTEN PERMISSION.

		SHEET	1	OF	2
BER:	J96 Assembly			ISSUE	
J96028822N34121					1

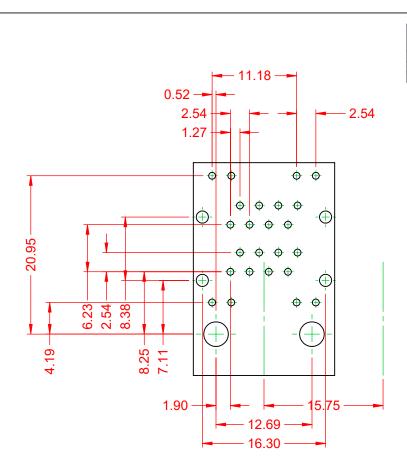

THIS IS A C.A.D. GENERATED DRAWING TOLERANCE UNLESS OTHERWISE SPECIFIED DO NOT MAKE MANUAL REVISIONS TO MASTER.

.X ±0.25 .XX ±0.13

.XXX ±0.05





ORIGINAL

(1)

## NOTES:

## 1. MATERIALS: **INSULATOR:**

CONTACT:

2. VOLTAGE RATING:

- 3. CURRENT RATING:
- 4. CONTACT RESISTANCE:

NYLON, BLACK, UL 94V-0 PHOSPHOR BRONZE, SELECT GOLD FLASH PLATING ON CONTACT AREA TIN ON TAILS OVER NICKEL 125 VAC RMS 1.5 AMPS @25°C  $20m\Omega MAX$ 

5. DIELECTRIC WITHSTANDING:	1000V AC CONTACT TO CONTACT OR
	1500VDC CONTACT TO SCREEN AND TEST PANEL
	@0.5mA 50Hz OR 60Hz 60s
6. DURABILITY:	750 CYCLES MIN
7. MATING/UNMATING FORCE:	30N/3.06KG MAX
8. RETENTION STRENGTH:	30N MIN FOR 60s ±5s
9. OPERATING TEMP:	-40 °C TO +85 °C
10. STORAGE TEMP:	-40°C TO +85°C RELATIVE HUMIDITY <80%

MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.

	ACAD REFERENCE NO.: J96 Assembly			
RJ45, 2 PORTS, RIGHT AN	DRAWN: C.B	DATE: January 20	DATE: January 20, 2020	
	CHECKED:	DATE:	DATE:	
EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INCAND	SCALE: 2:1	SHEET 2 OF	2
TORONTO, ONTARIO CANADA	SHALL NOT BE REPRODUCED OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWING NUMBER: J96	6 Assembly	ISSUE
YOUR CONNECTION TO QUALITY & SERVICE		PART NUMBER: J96	/BER: J96028822N34121	



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.