
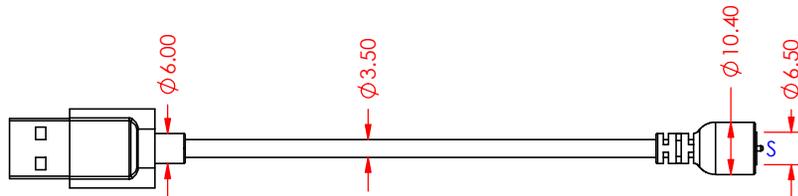

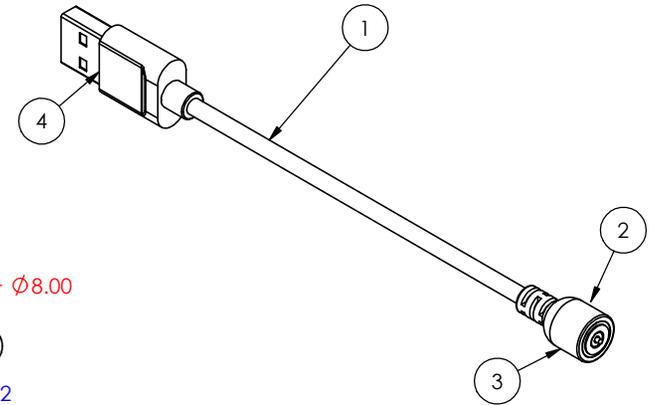



ITEM NO.	DESCRIPTION	QTY.
1	WIRE	1
2	MPM-V00-802-2P14-E00	1
3	OVERMOLDING	1
4	USB A-2.0	1

REVISIONS			
REV.	DESCRIPTION	DATE	BY
1	ORIGINAL	DRAWN DATE	

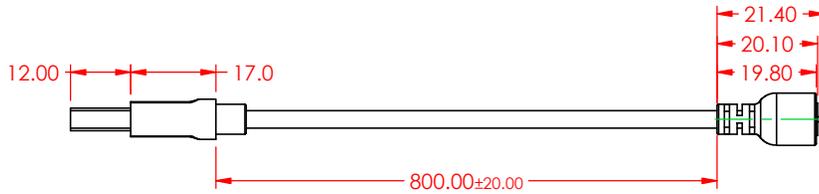

SPECIFICATIONS

CURRENT RATING:	1.5A
VOLTAGE RATING:	12V
WITHSTANDING VOLTAGE:	500V
INSULATION RESISTANCE:	1000MΩ MIN FOR 1 MIN
CONTACT RESISTANCE:	50mΩ MAX
TEMPERATURE RANGE:	-25°C TO 60°C

INSULATOR MATERIAL:	HTN
INSULATOR COLOR:	BLACK
CONTACT MATERIAL:	BRASS
CONTACT PLATING:	20μ" GOLD PLATING
MAGNET MATERIAL:	N52
MATING CYCLES:	10000

CABLE SPECIFICATIONS

CABLE MATERIAL:	PVC
CABLE COLOR:	BLACK
OVERMOLDING MATERIAL:	PVC
OVERMOLDING COLOR:	BLACK
OPPOSITE END:	USB A-2.0

STROKE:	1.1 MM
CONTACT FORCE:	80 ± 20 g

MATING PARTS:	MPF-V00-802-2R14-E00
---------------	----------------------

POGO PIN	WIRE COLOR	USB PIN NO.	SIGNAL
1	RED	1	VCC
-	-	2	-
-	-	3	-
2	BLACK	4	GND

NOTE: IR REFLOW AND WAVE SOLDERING NOT RECOMMENDED AS THE PROCESSES CAN DEMAGNETIZE THE CONNECTOR MAGNETS.



RoHS
COMPLIANT

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC, AND SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN BY	V.K.	MALE CABLE ASSEMBLY, CIRCULAR, 10.4 MM DIA, 2 POSITIONS, STRAIGHT			
DRAWN DATE	09/04/2025				
CHECKED BY	R.S.M.				
CHECK DATE	09/04/2025	PART NUMBER	MCM-Q00-0E2-2P14-BH0		
TOLERANCES	ALL DIMENSIONS AND TOLERANCES IN MM	MATERIAL	SIZE	A	
.X	±0.5				
.XX	±0.2				
.XXX	±0.1				
		REVISION		1	
SCALE	1:1.5	SHEET	1	OF	1