


## USB MINI & MICRO TYPE-B PLUGS - CABLE END

### Features:


- Up to 480 Mbps communication speed for standard USB 2.0
- Up to 5 Gbps communication speed for standard USB 3.0
- Industry standard plug and play technology - 'Hot Pluggable'
- Compatible with synchronous and asynchronous data transfer
- Data and power combined in one small package
- RoHS compliant

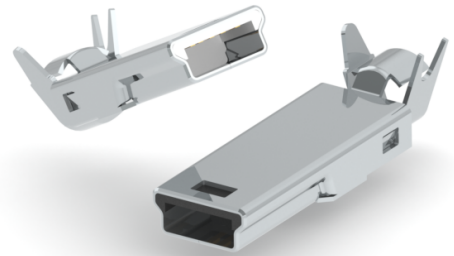

### Specifications:

Insulator Material	Thermoplastic UL-94V-0
Contact Material	Copper alloy
Contact Plating	Nickel under plating with Gold plating on contact areas and Tin plating on tails
Shell Material	Brass with Nickel plating
Insertion Force	35N maximum
Withdrawal Force	3N minimum 2.0 Mini / 8N minimum 2.0 Micro

### EXAMPLE PART NUMBER: 691G205J6A0-511

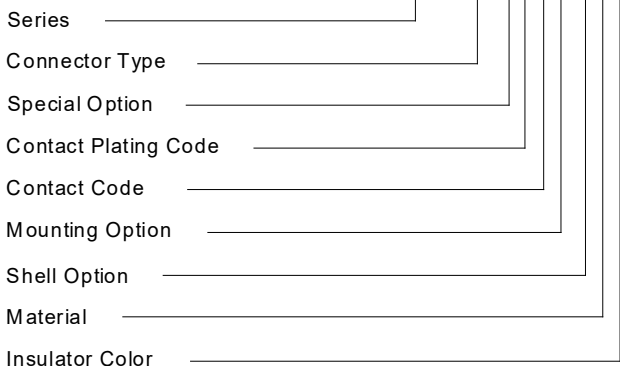

#### Series:

691G Plug

#### Connector Type:

205 USB 2.0 Mini-B

#### Special Option:

J Jacketed

#### Contact Plating:

1 2μ" ~ 5μ" Gold  
 2 Gold Flash  
 3 5μ" ~ 10μ" Gold  
 5 15μ" Gold  
 6 30μ" Gold

#### Contact Code:

A Solder Pads

#### Mounting Option:

0 None

#### Shell Option:

5 2 Piece Metal Shell with Cable Crimp

#### Material:

1 LCP  
 2 PBT

#### Insulator Color:

0 White / Natural  
 1 Black

#### Ordering Code Notes:

Not all part numbers deriving from this ordering guide will be available.

Some may be available upon request. Please first consult the website, if the connector is not readily available then please contact EDAC's customer service for further inquiries.