


Features


- Right-Angle termination type
- Single, and double rows
- Wide variety of plating options
- Different insulator materials available
- RoHS compliant

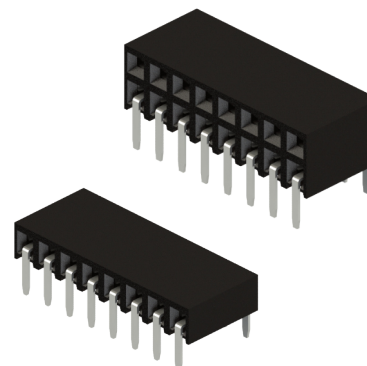

Specifications

Insulator Material	UL94V-0 Thermoplastic
Contact Material	Copper Alloy
Contact Plating	Tin Plating, Gold Plating
Current Rating	3 Amps
Contact Resistance	20 Milliohms maximum
Dielectric Withstanding Voltage	1000 VAC/minute
Insulation Resistance	1000 Megaohms minimum
Operating Temperature	-40°C to +105°C


Example Part Number

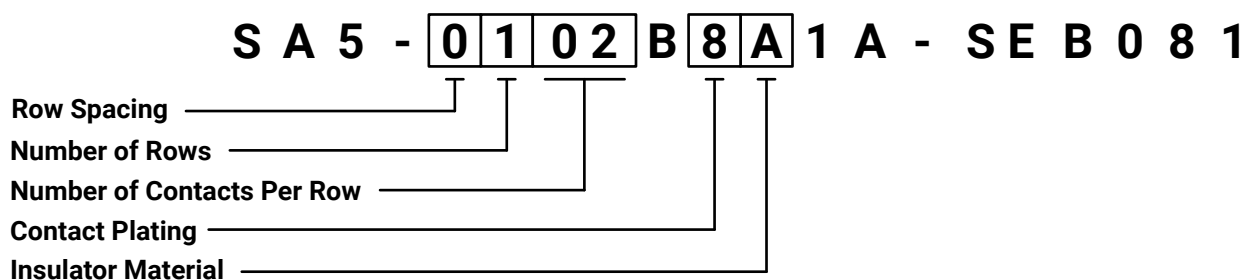

*** Please see next page for options

Row Spacing	Description		
0	Not Applicable (For Single Row Headers Only)		
5	2.54mm		
Number of Rows	Description		
1	Single Row		
2	Double Row		
Number of Contacts Per Row	Description		
02 - 40	Min 2 Positions ~ Max 40 Positions		
Contact Plating	Description	Contact Plating	Description
1	Gold Flash	A	Selective Gold Flash
2	Gold Plating 5µ"	B	Selective Gold Plating 5µ"
3	Gold Plating 10µ"	C	Selective Gold Plating 10µ"
4	Gold Plating 15µ"	D	Selective Gold Plating 15µ"
6	Gold Plating 30µ"	F	Selective Gold Plating 30µ"
8	Tin		
Insulator Material	Description		
A	PA9T		
B	PBT		

Single Row

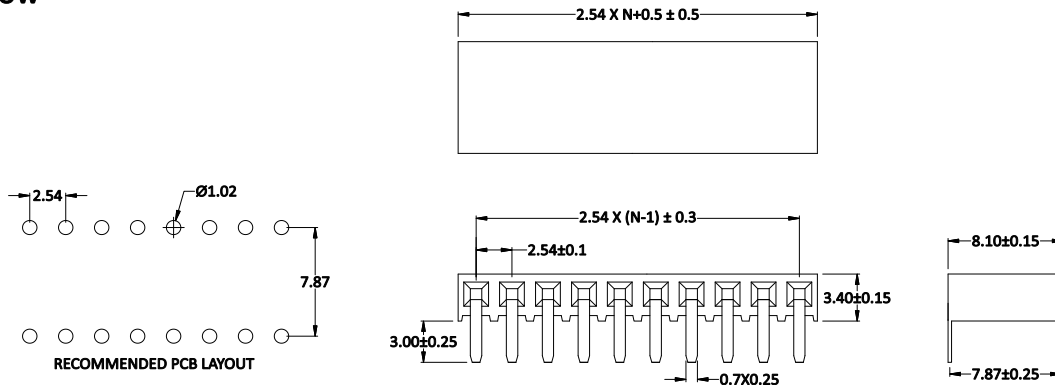

Double Row

