


Features


- Right-Angle SMT termination type
- Single, and double rows
- Wide variety of plating options
- RoHS compliant

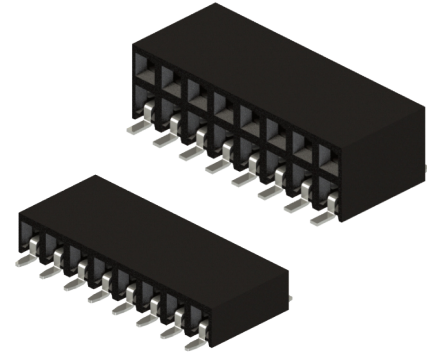

Specifications

Insulator Material	UL94V-0 Thermoplastic
Contact Material	Copper Alloy
Contact Plating	Tin Plating, Gold Plating
Current Rating	3 Amps
Contact Resistance	20 Milliohms maximum
Dielectric Withstanding Voltage	1000 VAC/minute
Insulation Resistance	1000 Megaohms minimum
Operating Temperature	-40°C to +105°C


Example Part Number

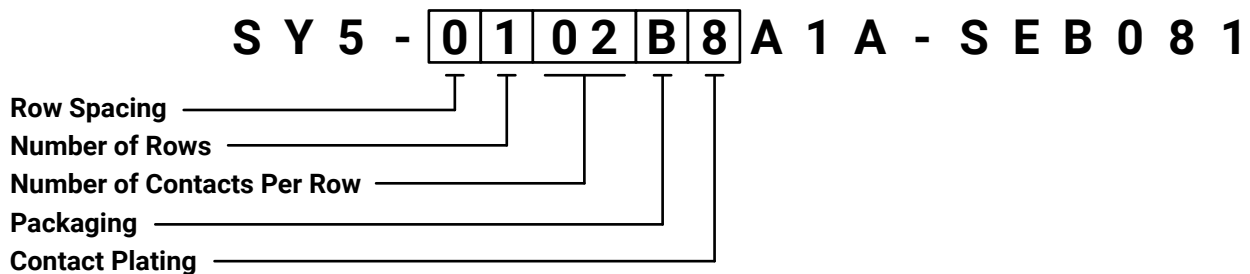

*** Please see next page for options

Row Spacing	Description		
0	Not Applicable (For Single Row Headers Only)		
5	2.54mm		
Number of Rows	Description		
1	Single Row		
2	Double Row		
Packaging	Description		
A	Tape and Reel (Up to 34 Positions)		
B	Tube		
Number of Contacts Per Row	Description		
02 - 40	Min 2 Positions ~ Max 40 Positions		
Contact Plating	Description	Contact Plating	Description
1	Gold Flash	A	Selective Gold Flash
2	Gold Plating 5μ"	B	Selective Gold Plating 5μ"
3	Gold Plating 10μ"	C	Selective Gold Plating 10μ"
4	Gold Plating 15μ"	D	Selective Gold Plating 15μ"
6	Gold Plating 30μ"	F	Selective Gold Plating 30μ"
8	Tin		

Single Row

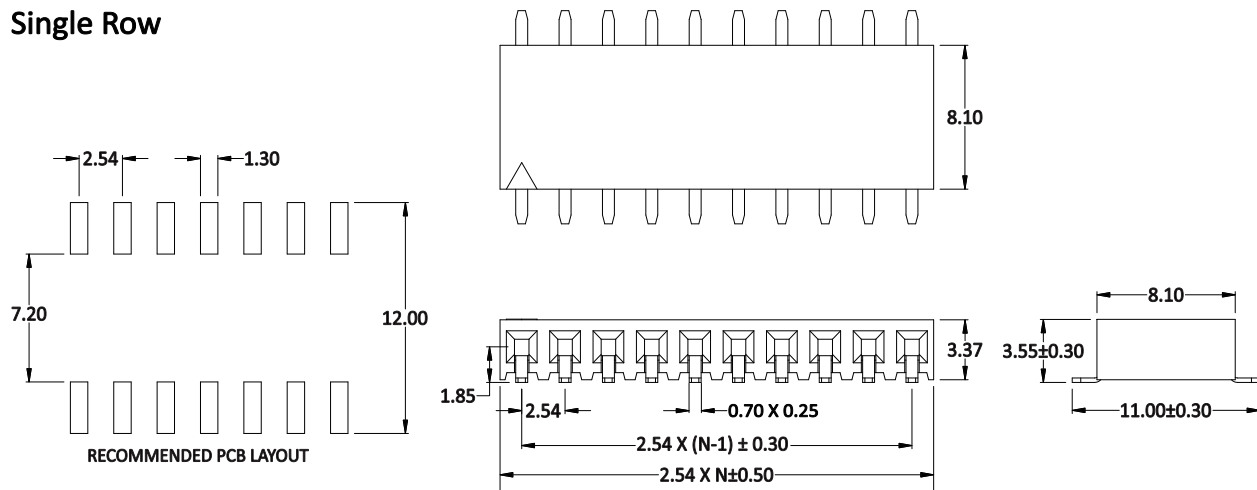

Double Row

