





.XX ±0.13 .XXX ±0.10






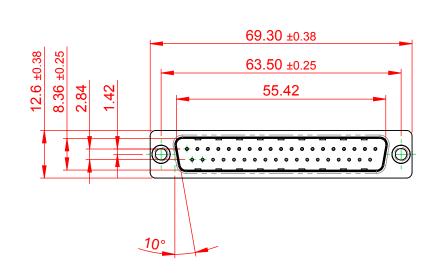







NOTES:

MATERIAL:

HOUSING: THERMOPLASTIC POLYESTER, UL94V-0 SHELL: STEEL, Sn or Ni PLATED CONTACT: COPPER ALLOY SEE ORDERING GUIDE FOR PLATING

OPERATING TEMPERATURE: -55°C ~ 85°C

CURRENT RATING: 3A PER CONTACT CONTACT RESISTANCE: 25mQ MAX. INSULATOR RESISTANCE: 5000MΩ min. DIELECTRIC WITHSTANDING VOLTAGE: 1000V AC rms

	627 SERIES D-SUB CONNECTOR		SW REFERENCE NO.: 627 ASSEMBLY		
			DRAWN: C.B	DATE: AUG. 01/2	018
			CHECKED:	DATE:	
YOUR CONNECTION T	EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	SCALE: 1:1	SHEET 1 OF	1
	TORONTO, ONTARIO CANADA		DRAWING NUMBER: 627-037-621-551		ISSUE
	YOUR CONNECTION TO QUALITY & SERVICE		PART NUMBER: 627-03	37-621-551	1





THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.