



TOLERANCE UNLESS OTHERWISE SPECIFIED	
.X	±0.25
.XX	±0.13
.XXX	±0.05

THIS IS A C.A.D. GENERATED DRAWING
DO NOT MAKE MANUAL REVISIONS TO MASTER.

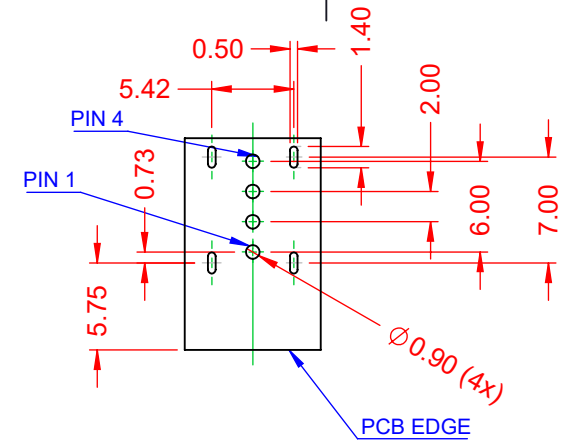

ISSUE NUMBER	1
ORIGINAL	

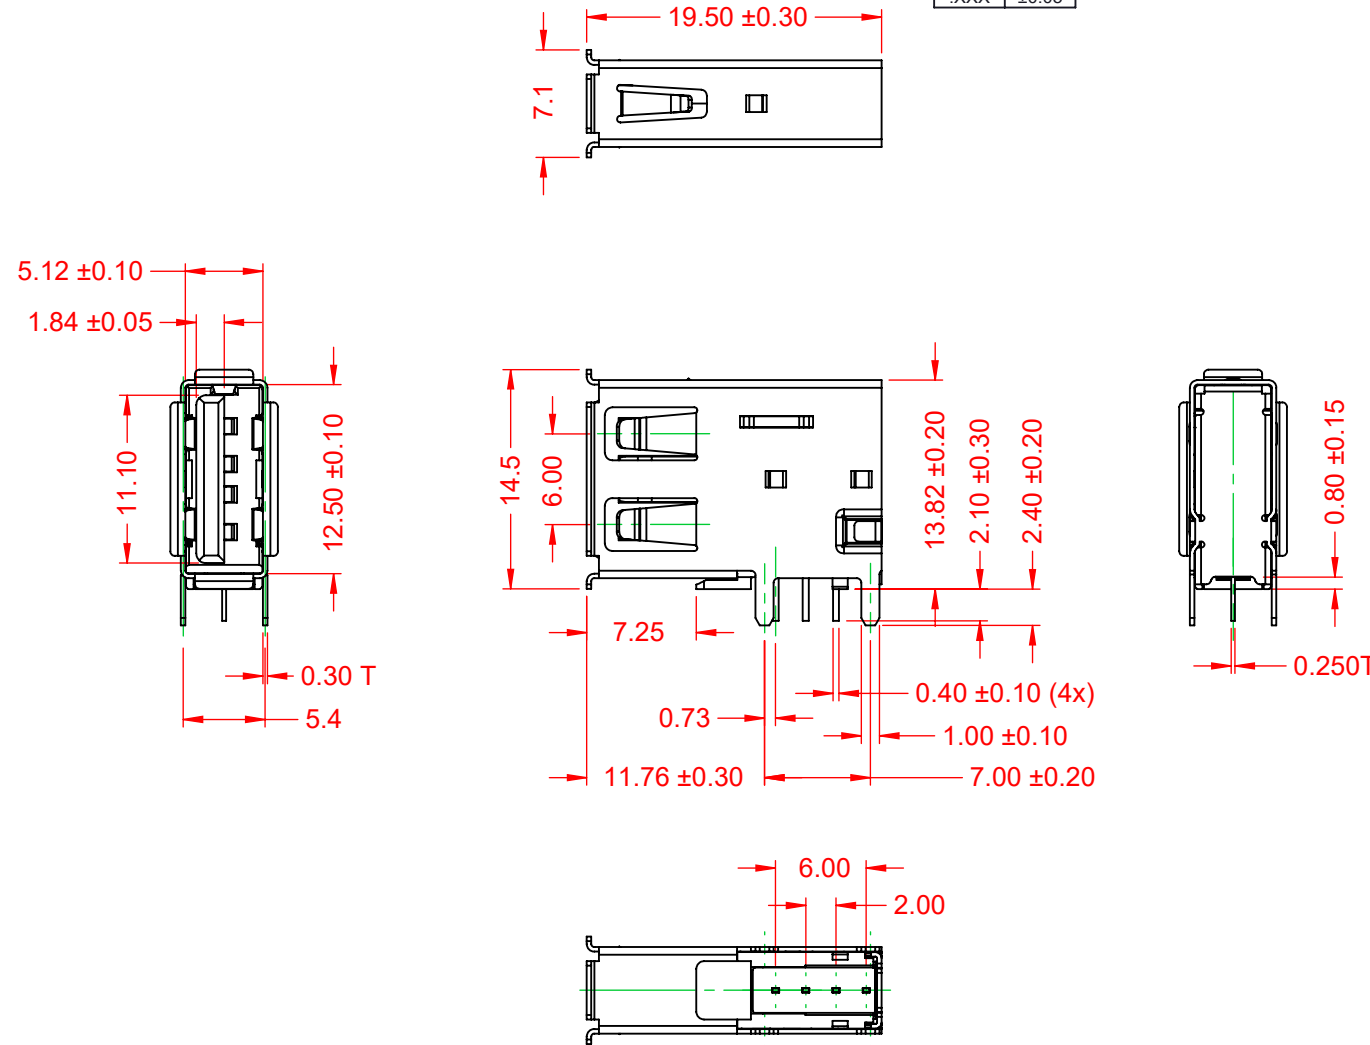

RECOMMENDED P.C.B HOLE LAYOUT
T=1.6 TOP VIEW (TOLERANCE: ±0.05)

NOTE:
ELECTRICAL SPECIFICATIONS:
CURRENT RATING: 1.5A @ 250V AC
VOLTAGE RATING: 30V
CONTACT RESISTANCE: 30mΩ MAX.
DIELECTRIC WITHSTANDING VOLTAGE: 500V AC
INSULATOR RESISTANCE: 1000MΩ min.
OPERATING TEMPERATURE: -40°C-85°C

MATERIAL & FINISH:
SHELL: NICKEL/TIN PLATED
HOUSING: LCP, BLACK IN COLOUR, UL94V-0
CONTACTS: 1µ" GOLD PLATING / MATTE TIN PLATED



THIS SERIES FULLY CONFORMS TO
THE EUROPEAN UNION DIRECTIVES
2011/65/EU FOR RoHS COMPLIANCY.



YOUR CONNECTION TO QUALITY & SERVICE

EDAC INC
TORONTO, ONTARIO
CANADA

THESE DRAWINGS AND SPECIFICATIONS
ARE THE PROPERTY OF EDAC INC., AND
SHALL NOT BE REPRODUCED, OR COPIED
OR USED AS THE BASIS FOR THE
MANUFACTURE OR SALE OF APPARATUS
WITHOUT WRITTEN PERMISSION.

690 SERIES RECEPTACLES USB 2.0
TYPE-A UPRIGHT R/ANGLE PCB

ACAD REFERENCE NO.: 690C104-132-011	
DRAWN: C.B	DATE: January 12, 2021
CHECKED:	DATE:
SCALE: 2:1	SHEET 1 OF 1
DRAWING NUMBER: 690C104-132-011	ISSUE
PART NUMBER: 690-104-132-011	1