
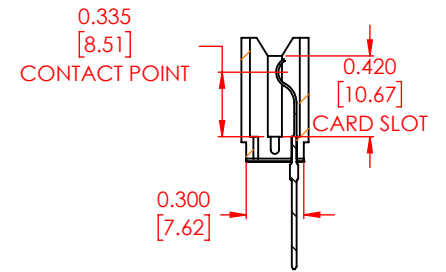
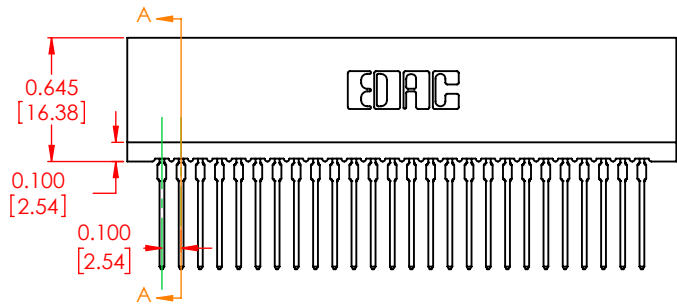


REVISIONS			
REV.	DESCRIPTION	DATE	BY
1	ORIGINAL	DRAWN DATE	

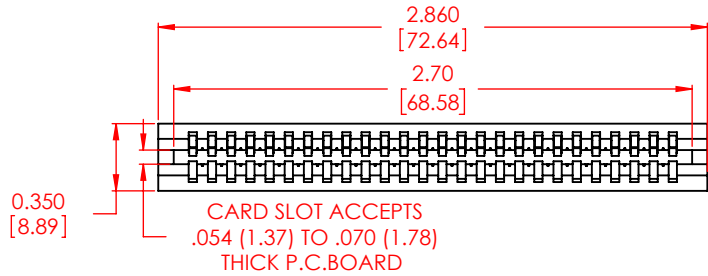

SECTION A-A

SPECIFICATIONS

CURRENT RATING: 3A
 WITHSTANDING VOLTAGE: 1200VAC
 INSULATION RESISTANCE: 5000 MΩ MIN.
 CONTACT RESISTANCE: 10 mΩ MAX.
 TEMPERATURE RANGE: -40°C TO 105°C

INSULATOR MATERIAL: PPS
 INSULATOR COLOR: BLACK
 CONTACT MATERIAL: COPPER ALLOY
 CONTACT PLATING: 30μ" SELECTIVE GOLD
 TERMINATION TYPE: WIRE WRAP
 TAIL LENGTH: 14.22MM



RoHS
COMPLIANT

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC, AND SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN BY	J.S.M	745 SERIES, PRESSFIT CARD EDGE CONNECTOR, 2.54 PITCH, 26 POSITIONS				
DRAWN DATE	12/09/2025					
CHECKED BY	V.K	PART NUMBER	745-026-545-106			
CHECK DATE	12/09/2025					
TOLERANCES	ALL DIMENSIONS AND TOLERANCES IN MM		MATERIAL	PPS	SIZE	A
	.X	±0.30	NOTES:			REVISION
	.XX	±0.25				1
.XXX	±0.10	SCALE	1:1	SHEET	1 OF 1	