

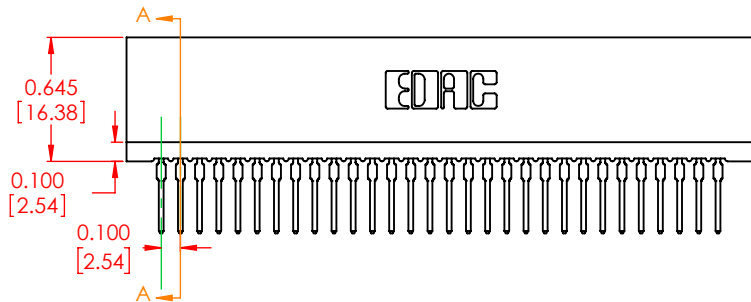


REVISIONS			
REV.	DESCRIPTION	DATE	BY
1	ORIGINAL	DRAWN DATE	

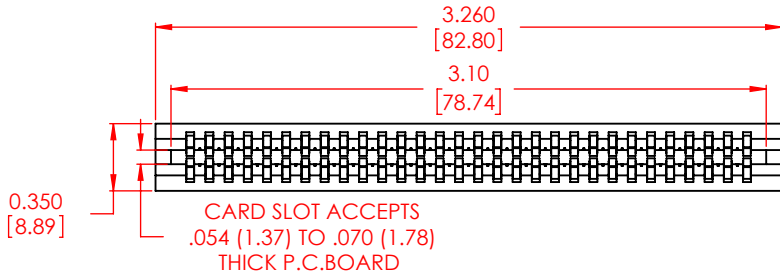

SECTION A-A

SPECIFICATIONS

CURRENT RATING: 3A  
 WITHSTANDING VOLTAGE: 1200VAC  
 INSULATION RESISTANCE: 5000 MΩ MIN.  
 CONTACT RESISTANCE: 10 mΩ MAX.  
 TEMPERATURE RANGE: -40°C TO 105°C

INSULATOR MATERIAL: PPS  
 INSULATOR COLOR: BLACK  
 CONTACT MATERIAL: COPPER ALLOY  
 CONTACT PLATING: 30μ" SELECTIVE GOLD  
 TERMINATION TYPE: P.C.TAIL  
 TAIL LENGTH: 9.53MM



RoHS  
COMPLIANT

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC, AND SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN BY	J.S.M	745 SERIES, PRESSFIT CARD EDGE CONNECTOR, 2.54 PITCH, 60 POSITIONS				
DRAWN DATE	12/09/2025					
CHECKED BY	V.K	PART NUMBER	745-060-522-206			
CHECK DATE	12/09/2025					
TOLERANCES	ALL DIMENSIONS AND TOLERANCES IN MM		MATERIAL	PPS	SIZE	A
	.X	±0.30	NOTES:			REVISION
	.XX	±0.25				1
.XXX	±0.10	SCALE	1:1	SHEET	1 OF 1	