




THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.




**ISSUE NUMBER** ORIGINAL

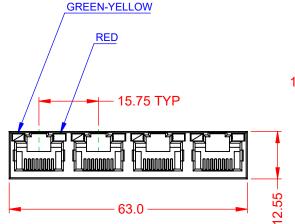



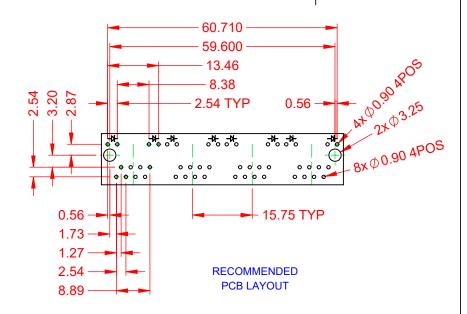

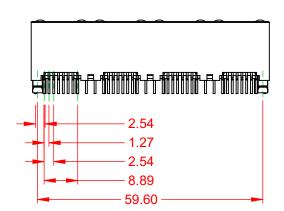

## NOTES:

1. MATERIALS:

**INSULATOR:** NYLON, BLACK, UL 94V-0 CONTACT: PHOSPHOR BRONZE.

SELECT GOLD FLASH PLATING ON CONTACT AREA

TIN ON TAILS OVER NICKEL

2. VOLTAGE RATING: 150 VAC RMS 3. CURRENT RATING: 1.5 AMPS @25°C 4. CONTACT RESISTANCE: 20mΩ MAX

5. INSULATOR RESISTANCE: 1000MΩ MIN @ 500V DC

1000V AC CONTACT TO CONTACT 5. DIELECTRIC WITHSTANDING:

@0.5mA 50Hz OR 60Hz 60s

6. DURABILITY: 750 CYCLES MIN 30N/3.06KG MAX 7. MATING/UNMATING FORCE: 8. RETENTION STRENGTH: 50N MIN FOR 60s ±5s -40°C TO +85°C 9. OPERATING TEMP:

10. STORAGE TEMP: -40°C TO +85°C RELATIVE HUMIDITY <80%

MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.

## RJ45, VERTICAL PCB MOUNT, 4 PORTS

CANADA

YOUR CONNECTION TO QUALITY & SERVICE

THESE DRAWINGS AND SPECIFICATIONS **EDAC INC** ARE THE PROPERTY OF EDAC INC..AND TORONTO, ONTARIO SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS

WITHOUT WRITTEN PERMISSION.

ACAD REFERENCE NO.: DRAWN: Y.Z DATE: November 25, 2019 CHECKED: DATE: OF SCALE: 2:1 SHEET 1 J2W Assembly ISSUE DRAWING NUMBER:

PART NUMBER:

J2W Assembly

J2W048821N52031

THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.